


KWC

EVE

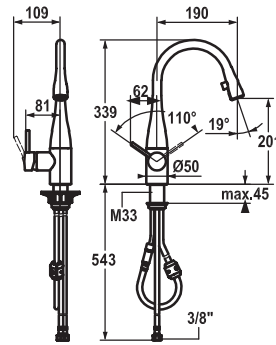

FUN	KWC-No.
115.0307.892	10.111.102.000FL
all chrome, A 190, flexible connection hoses	
115.0307.893	10.111.102.700FL
stainless steel, A 190, flexible connection hoses	


Lever mixer ■ Kitchen

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
 - Neoperl® Caché®
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 11 l/min (3 bar)
Acoustic group I

<p>Z.535.263.000 LED Z.535.263.700</p> <p>Z.536.165 M18.5x1</p> <p>Z.536.254.000 LED Z.536.254.700</p>	<p>A 190 Z.535.583.000 Z.535.583.700</p>	<p>Z.635.385 SW 32</p> <p>Z.534.836 12 Nm + 1 Nm</p> <p>Z.536.578.000</p> <p>Z.536.052.000</p>
<p>CH/EU:</p> <p>M16x1 M14x1 M12x1</p> <p>Z.535.331 Z.536.228</p>	<p>Z.601.981</p> <p>Z.536.007</p>	<p>Z.536.578.700</p> <p>Z.635.385 SW 32</p> <p>Z.534.836 12 Nm + 1 Nm</p> <p>Z.536.008.700</p>
<p>M18.5x1 Z.634.729</p> <p>CACHE® NEOPERL®</p>	<p>Z.534.836 12 Nm + 1 Nm</p> <p>Z.635.385 SW 32</p>	<p>Z.638.943</p> <p>Z.532.241</p> <p>Z.538.336</p> <p>Z.535.773</p> <p>Z.536.228</p> <p>M16x1 M14x1 M12x1</p>

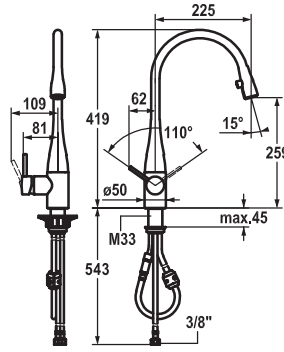

FUN	KWC-No.
115.0308.181	10.111.103.000FL
all chrome, A 225, flexible connection hoses	
115.0308.183	10.111.103.700FL
stainless steel, A 225, flexible connection hoses	


Lever mixer ■ Kitchen

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
 - Neoperl® Caché®
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 11 l/min (3 bar)
Acoustic group I

<p>Z.636.165 M18.5x1</p> <p>Z.535.263.000 LED Z.535.263.700 Z.536.254.000 Z.536.254.700</p>	<p>A 225 Z.535.300.000 Z.535.300.700</p>	<p>Z.536.578.000</p> <p>12 Nm + 1 Nm Z.534.836</p> <p>Z.635.385 SW 32</p> <p>Z.536.052.000</p>
<p>CH/EU:</p> <p>M16x1 M14x1 M12x1</p> <p>Z.535.331 Z.536.228</p>	<p>Z.601.981</p> <p>Z.536.007</p>	<p>Z.536.578.700</p> <p>Z.635.385 SW 32</p> <p>Z.534.836 12 Nm + 1 Nm</p> <p>Z.536.008.700</p>
<p>M18.5x1 Z.634.729</p> <p>CACHE® NEOPERL®</p>		<p>Z.534.836 12 Nm + 1 Nm</p> <p>Z.635.385 SW 32</p>
<p>Z.638.943</p> <p>Z.532.241</p> <p>Z.538.336</p> <p>M16x1 M14x1 M12x1</p> <p>Z.535.773</p> <p>Z.536.228</p>		

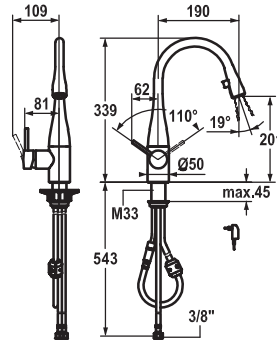

FUN	KWC-No.
115.0307.894	10.121.102.000FL
all chrome, A 190, flexible connection hoses, mains receiver	
115.0307.869	10.121.102.700FL
stainless steel, A 190, flexible connection hoses, mains receiver	


Lever mixer ■ Kitchen ■ with LEDShine

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
 - Neoperl® Caché®
 - integrated ON/OFF push-button with automatic shut-off after 45 minutes
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
 - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 10 l/min (3 bar)
Acoustic group I

<p>Z.535.263.000 LED Z.535.263.700</p> <p>Z.536.165 M18.5x1</p> <p>Z.536.254.000 LED Z.536.254.700</p>	<p>A 190 Z.535.583.000 Z.535.583.700</p>	<p>Z.536.578.000</p> <p>12 Nm + 1 Nm Z.534.836</p> <p>Z.635.385 SW 32</p> <p>Z.536.052.000</p>	<p>GB: AUS: USA/JPN:</p> <p>Z.537.429</p> <p>L = 1100 mm / 43 5/16"</p> <p>CH/EU: Z.635.582</p>
<p>CH/EU:</p> <p>M16x1 Z.535.331</p> <p>M14x1</p>	<p>Z.601.981</p> <p>Z.536.007</p>	<p>Z.536.578.700</p> <p>Z.635.385 SW 32</p> <p>Z.534.836 12 Nm + 1 Nm</p> <p>Z.536.008.700</p>	<p>Z.638.943</p> <p>Z.532.241</p> <p>Z.538.336</p>
<p>M18.5x1 Z.634.729</p> <p>CACHE® NEOPERL®</p>	<p>Z.534.836 12 Nm + 1 Nm</p> <p>Z.635.385 SW 32</p>	<p>Z.535.773</p> <p>M16x1 M14x1</p>	

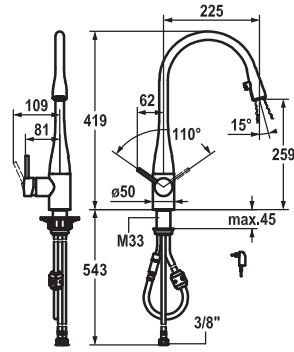


FUN	KWC-No.
115.0308.180	10.121.103.000FL
all chrome, A 225, flexible connection hoses, mains receiver	
115.0308.182	10.121.103.700FL
stainless steel, A 225, flexible connection hoses, mains receiver	


Lever mixer ■ Kitchen ■ with LEDShine

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
 - Neoperl® Caché®
 - integrated ON/OFF push-button with automatic shut-off after 45 minutes
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
 - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 10 l/min (3 bar)
Acoustic group I

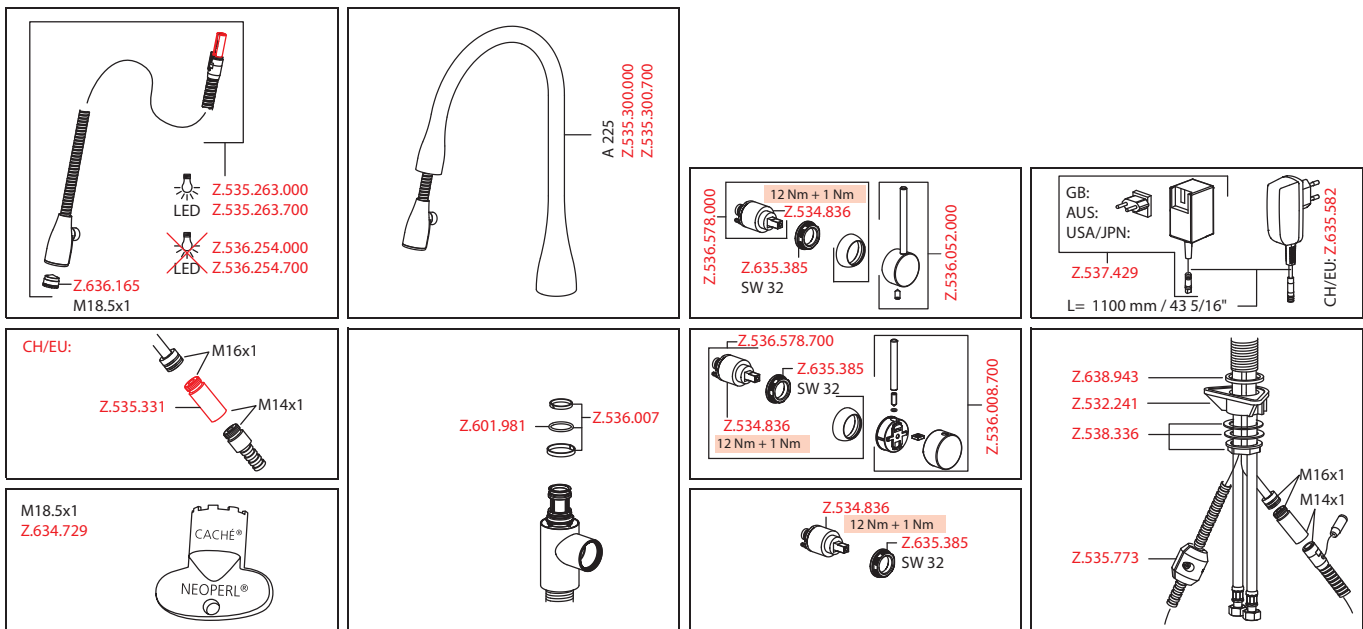

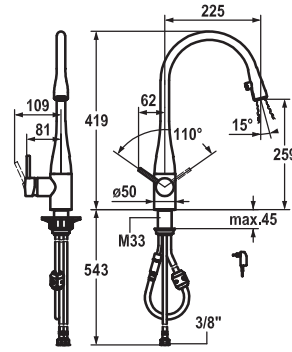

FUN	KWC-No.
115.0308.203	10.121.103.150FL
glacier white, A 225, flexible connection hoses, mains receiver	


Lever mixer ■ Kitchen ■ with LEDShine

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
 - Neoperl® Caché®
 - integrated ON/OFF push-button with automatic shut-off after 45 minutes
 - up to 600 mm pull-out length
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
 - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 10 l/min (3 bar)
Acoustic group I

<p>Z.636.165 M18.5x1</p> <p>Z.535.263.000 LED</p>	<p>A 225 Z.535.300.150 Z.535.300.151</p>	<p>GB: AUS: USA/JPN: Z.537.429</p> <p>CH/EU: Z.635.582</p> <p>L = 1100 mm / 43 5/16"</p>
<p>CH/EU:</p> <p>M16x1 Z.535.331 M14x1</p>	<p>Z.601.981 Z.536.007</p>	<p>Z.536.578.150 Z.536.578.151 Z.634.612.150 Z.634.612.151 Z.534.836 12 Nm + 1 Nm</p> <p>Z.536.052.150 Z.536.052.151</p>
<p>M18.5x1 Z.634.729</p> <p>CACHÉ® NEOPERL®</p>	<p>Z.534.836 12 Nm + 1 Nm Z.635.385 SW 32</p>	<p>Z.638.943 Z.532.241 Z.538.336 M16x1 M14x1 Z.535.773</p>

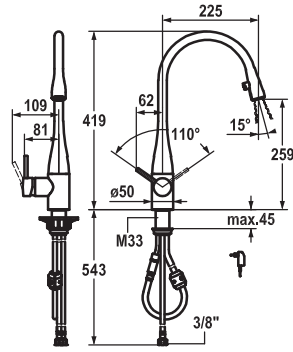

FUN	KWC-No.
115.0308.204	10.121.103.151FL
black chrome-plated, A 225, flexible connection hoses, mains receiver	


Lever mixer ■ Kitchen ■ with LEDShine

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
 - Neoperl® Caché®
 - integrated ON/OFF push-button with automatic shut-off after 45 minutes
 - up to 600 mm pull-out length
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
 - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 10 l/min (3 bar)
Acoustic group I


<p>Z.535.263.000 LED Z.636.165 M18.5x1</p>	<p>A 225 Z.535.300.000 Z.535.300.150 Z.535.300.700 Z.535.300.151</p>	<p>CH/EU: Z.635.582 L= 1100 mm / 31 1/2"</p>
<p>CH/EU: Z.535.331 M16x1 M14x1</p>	<p>Z.601.981 Z.536.007</p>	<p>Z.536.578.150 Z.536.578.151 Z.634.612.150 Z.634.612.151 Z.534.836 12 Nm + 1 Nm Z.536.052.150 Z.536.052.151</p>
<p>M18.5x1 Z.634.729 CACHE® NEOPERL®</p>	<p>Z.534.836 12 Nm + 1 Nm Z.635.385 SW 32</p>	<p>Z.638.943 Z.532.241 Z.538.336 M16x1 M14x1 Z.535.773</p>

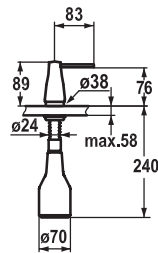

FUN	KWC-No.
119.0307.870 all chrome	Z.536.063.000
119.0307.901 stainless steel	Z.536.063.700

Soap dispenser KWC EVE


- Easily refillable from top without disassembly
- Mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - Pump
 - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
 - Escutcheon Z.536.291.000 or Z.536.292.700

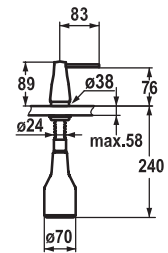

FUN	KWC-No.
119.0308.349 black chrome-plated	Z.536.063.151

Soap dispenser KWC EVE

- Easily refillable from top without disassembly
- Mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - Pump
 - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
 - Escutcheon Z.536.291.000 or Z.536.292.700



FUN	KWC-No.
119.0308.348 glacier white	Z.536.063.150

Soap dispenser KWC EVE

- Easily refillable from top without disassembly
- Mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - Pump
 - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
 - Escutcheon Z.536.291.000 or Z.536.292.700