


**KWC**

**LUNA-E**

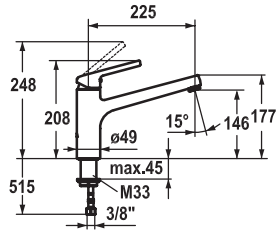



FUN	KWC-No.
<b>115.0457.304</b>	10.441.023.000FL
all chrome, A 225, flexible connection hoses	

**Lever mixer ■ Kitchen**

Lever mixer

- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 11 l/min (3 bar)  
 Flow rate 12 l/min (3 bar)  
 Acoustic group I

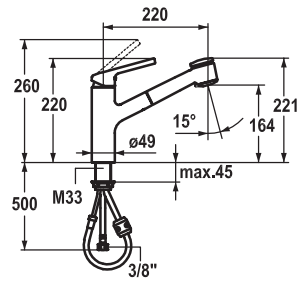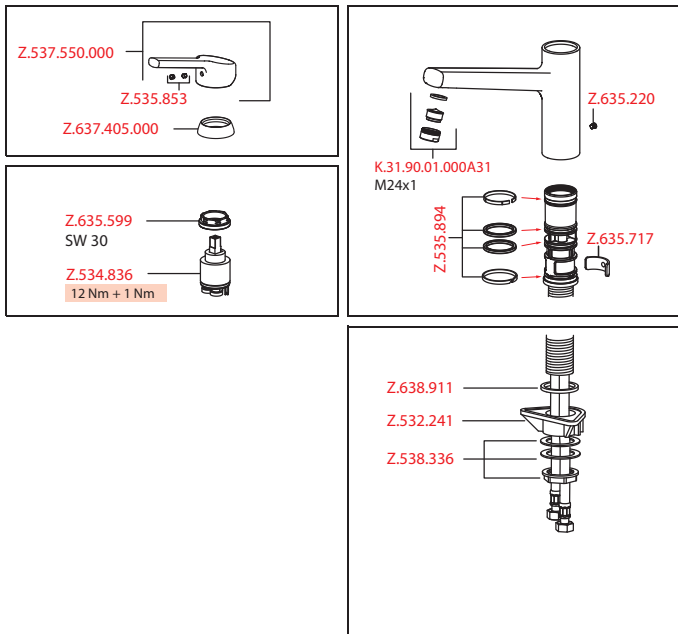


FUN	KWC-No.
<b>115.0457.309</b>	10.441.033.000FL
all chrome, A 220, flexible connection hoses	


**Lever mixer ■ Kitchen**

Lever mixer


- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 10 l/min (3 bar)  
 Flow rate needle spray 10 l/min (3 bar)  
 Acoustic group II

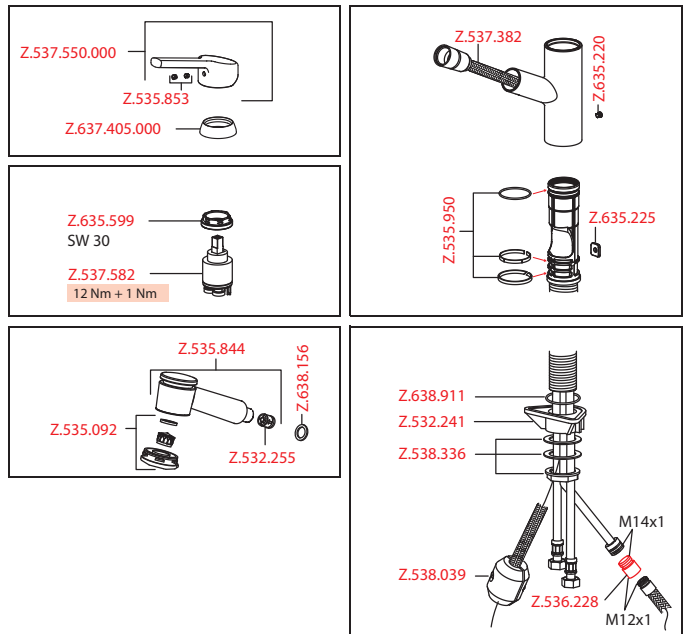

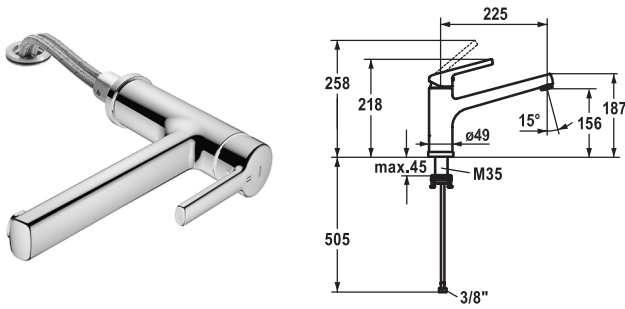

FUN	KWC-No.
<b>115.0603.259</b>	10.441.043.000FL
all chrome, A 225, flexible connection hoses	

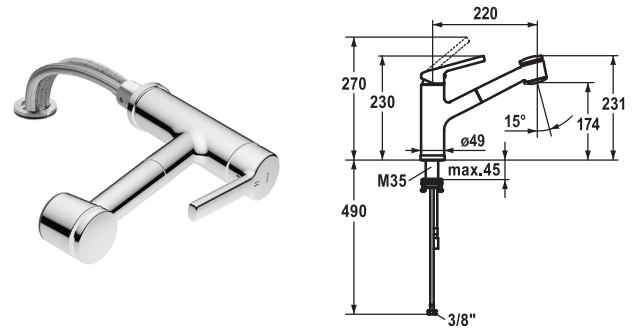

FUN	KWC-No.
<b>115.0603.260</b>	10.441.053.000FL
all chrome, A 220, flexible connection hoses	

**Lever mixer ■ Kitchen ■ detachable**

Lever mixer


- Detachable for installation below windows - detached 55 mm
- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size ø35 - 37 mm

**Lever mixer ■ Kitchen ■ detachable**


Lever mixer


- Detachable for installation below windows - detached 55 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size ø35 - 37 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

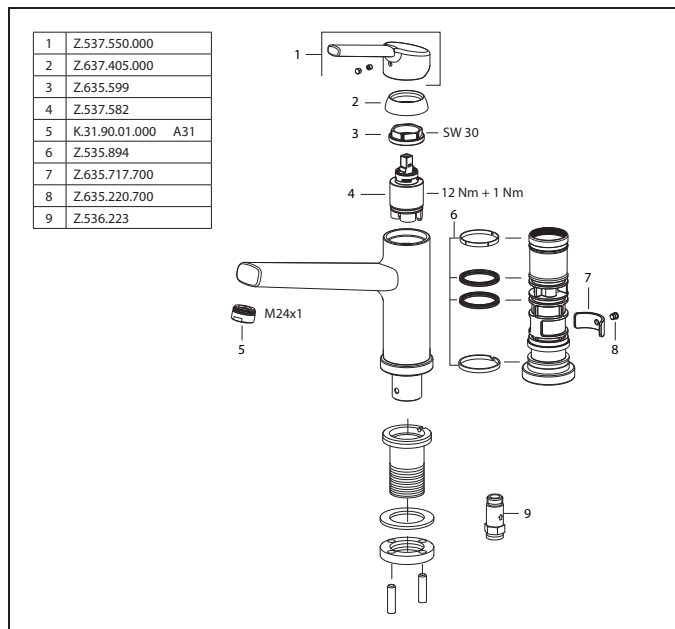

Flow rate normal spray 10 l/min (3 bar)  
Flow rate needle spray 9 l/min (3 bar)  
Acoustic group I

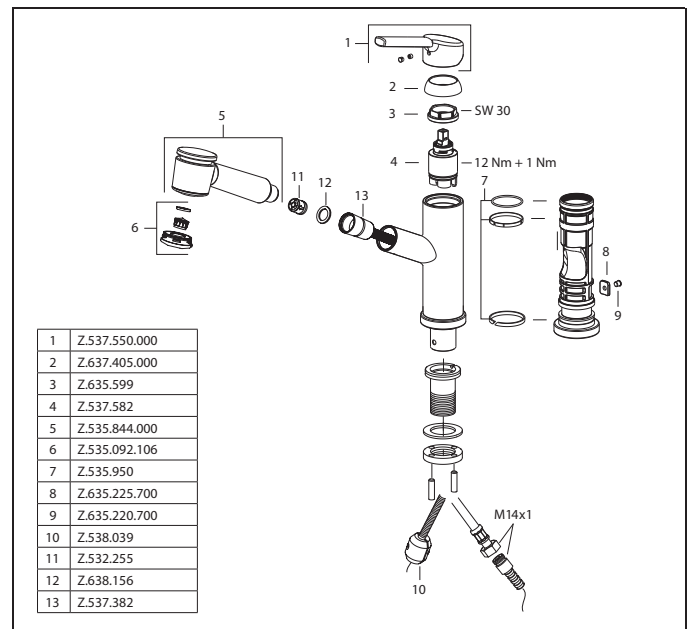

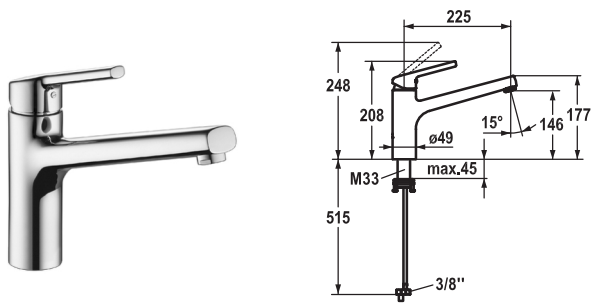


FUN

KWC-No.

**115.0603.291**

10.445.023.000FL

all chrome, A 225, flexible connection hoses

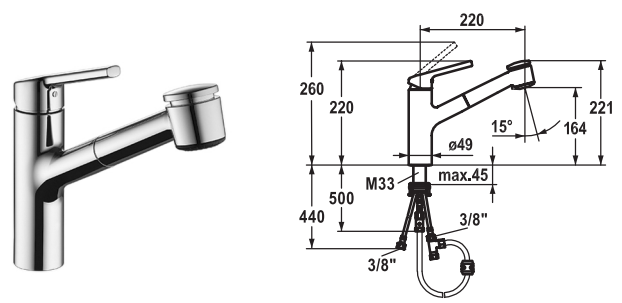

FUN

KWC-No.

**115.0603.292**

10.445.033.000FL

all chrome, A 220, flexible connection hoses

**Lever mixer ■ Kitchen ■ Low pressure**

Lever mixer

- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm


**Lever mixer ■ Kitchen ■ Low pressure**

Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate 6 l/min (3 bar)


Acoustic group I

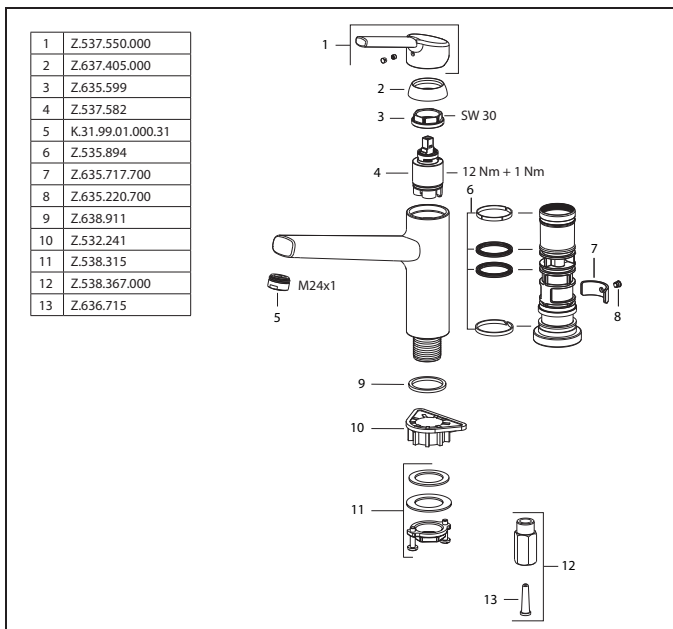


Flow rate normal spray 7 l/min (3 bar)


Flow rate needle spray 7 l/min (3 bar)

Acoustic group I

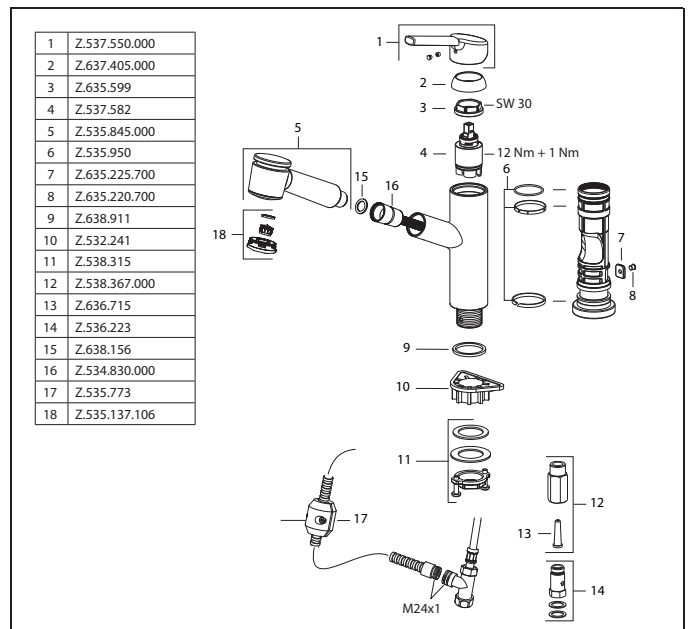

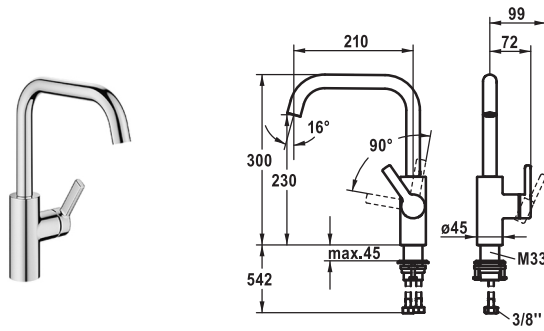

**FUN** KWC-No. **115.0603.255** 10.441.013.000FL  
all chrome, A 210, flexible connection hoses

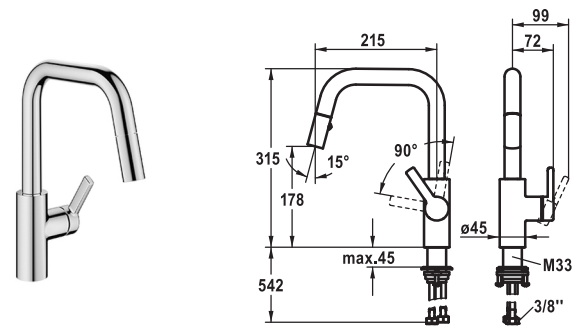


**FUN** KWC-No. **115.0603.257** 10.441.004.000FL  
all chrome, A 215, flexible connection hoses

**Lever mixer ■ Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 25 mm
- SwivelStop - swivel spout 360°, limitable to 150°
  - Neoperl® Caché®
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

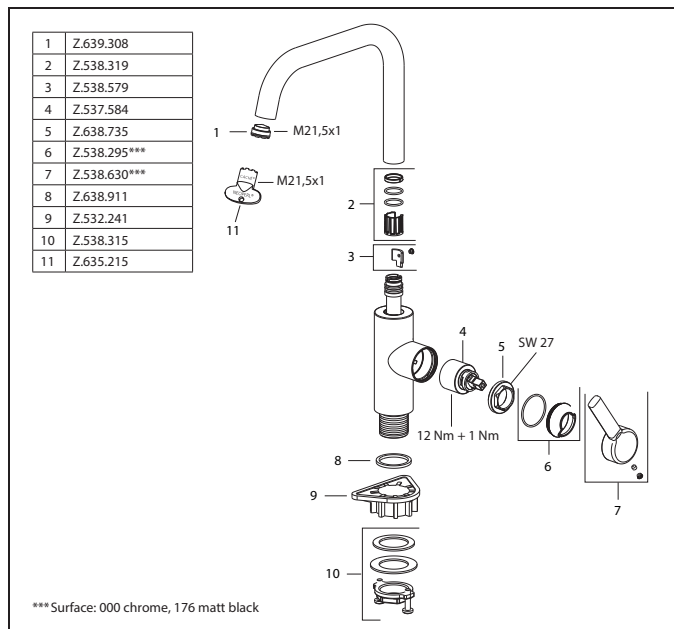



**Lever mixer ■ Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 25 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 400 mm pull-out length
  - black fabric hose
- QuickConnect - Simple hose connection system
- SwivelStop - hose guide, swivelling 360°, limitable to 150°
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)  
Flow rate needle spray 8 l/min (3 bar)  
Acoustic group I

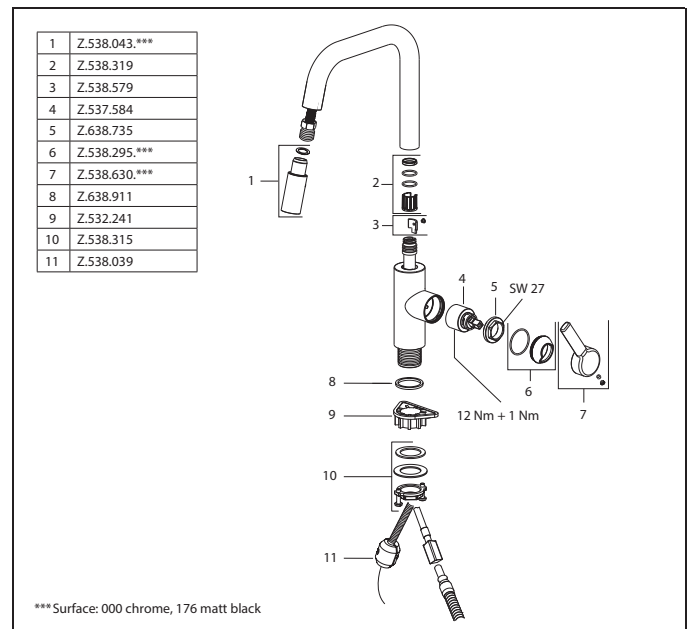

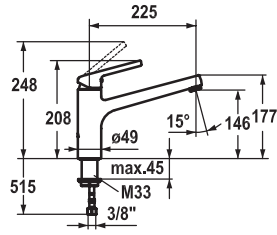



FUN KWC-No.  
**115.0605.194** 10.441.023.176FL  
 matt black, A 225, flexible connection hoses

**Lever mixer ■ Kitchen**

Lever mixer

- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 11 l/min (3 bar)  
 Flow rate 12 l/min (3 bar)  
 Acoustic group I

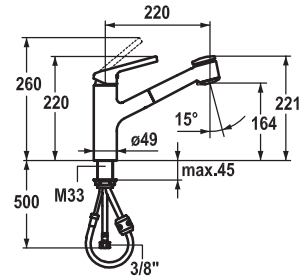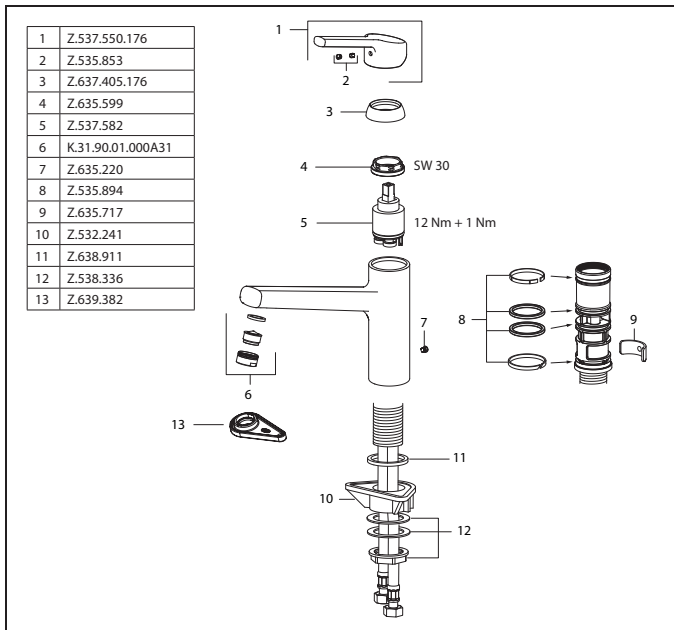


FUN KWC-No.  
**115.0605.197** 10.441.033.176FL  
 matt black, A 220, flexible connection hoses


**Lever mixer ■ Kitchen**

Lever mixer


- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode, with automatic diverter reset
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 10 l/min (3 bar)  
 Flow rate needle spray 10 l/min (3 bar)  
 Acoustic group I

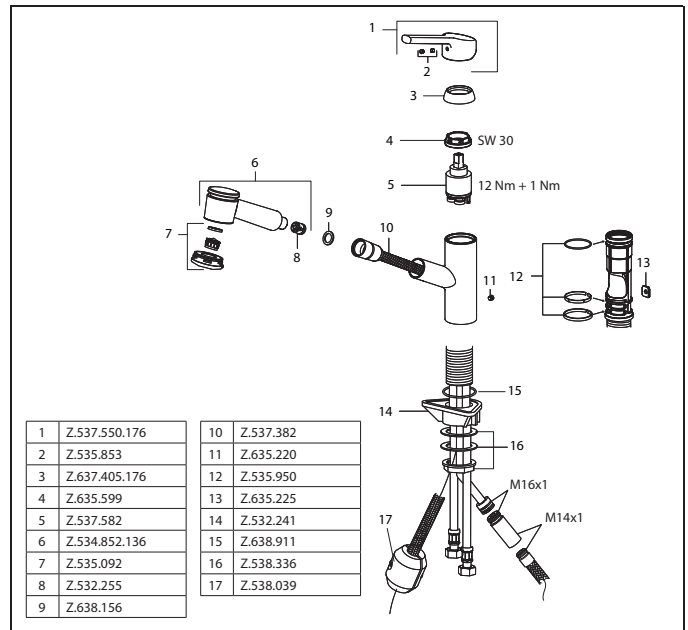

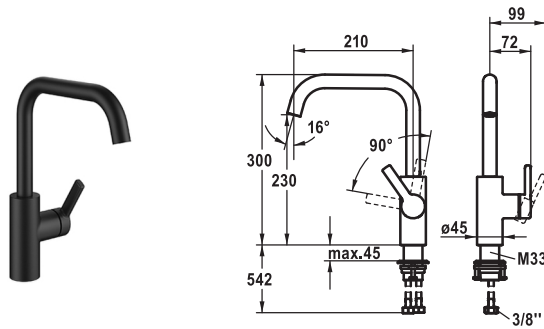

**FUN** KWC-No. **115.0603.256** 10.441.013.176FL  
 matt black, A 210, flexible connection hoses

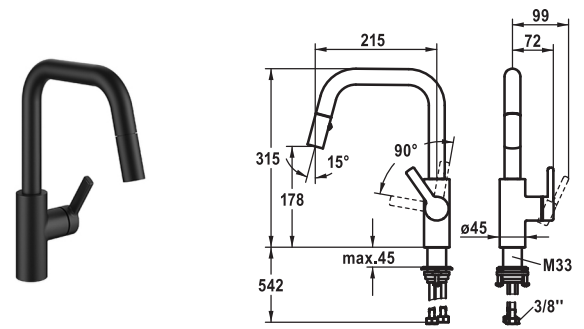


**FUN** KWC-No. **115.0603.258** 10.441.004.176FL  
 matt black, A 215, flexible connection hoses

**Lever mixer ■ Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 25 mm
- SwivelStop - swivel spout 360°, limitable to 150°
  - Neoperl® Caché®
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
 Acoustic group I

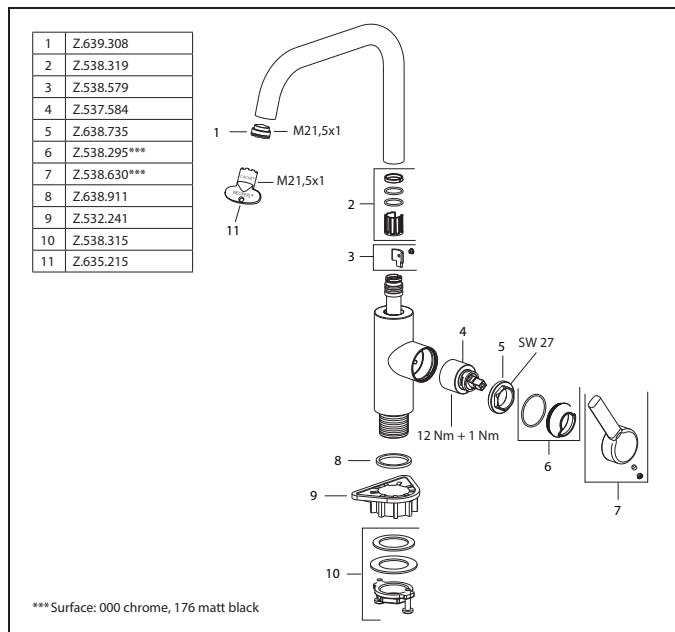

**Lever mixer ■ Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 25 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 400 mm pull-out length
  - black fabric hose
- QuickConnect - Simple hose connection system
- SwivelStop - hose guide, swivelling 360°, limitable to 150°
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)  
 Flow rate needle spray 8 l/min (3 bar)  
 Acoustic group I

