


**KWC**

**ZOE**

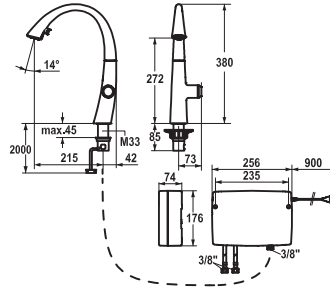







<b>FUN</b>	KWC-No.
<b>115.0393.145</b>	10.201.242.000FL
all chrome, A 215, flexible connection hoses, mains receiver	


**Kitchen ■ with LEDShine, touch light PRO**

- IntelligentControl - electronic control
  - touch light PRO technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- Position of control unit only possible on the right side
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings

- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length
  - hose surface to fit faucet surface
- SwivelStop - hose guide, swivelling 270° , limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material

Flow rate normal spray 9 l/min (3 bar)  
 Flow rate needle spray 10 l/min (3 bar)  
 Acoustic group I

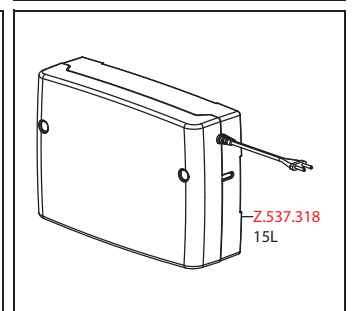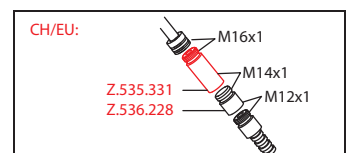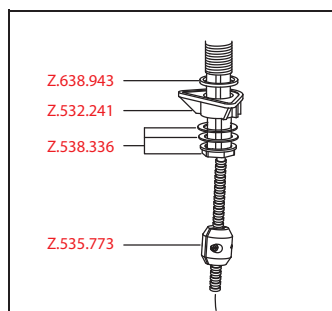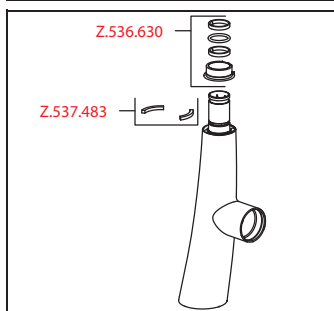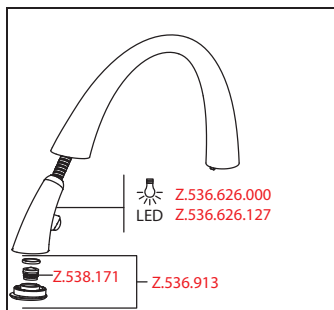

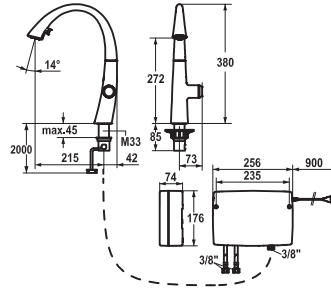







FUN	KWC-No.
<b>115.0393.163</b>	10.201.242.127FL
decor steel, A 215, flexible connection hoses, mains receiver	


### Kitchen ■ with LEDShine, touch light PRO

- IntelligentControl - electronic control
  - touch light PRO technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- Position of control unit only possible on the right side
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings

- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length
  - hose surface to fit faucet surface
- SwivelStop - hose guide, swivelling 270° , limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material

Flow rate normal spray 9 l/min (3 bar)  
 Flow rate needle spray 10 l/min (3 bar)  
 Acoustic group I

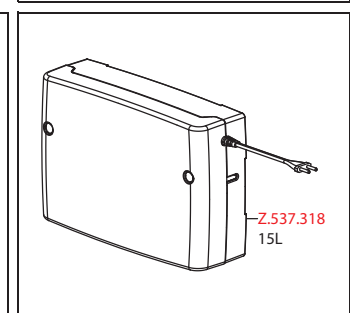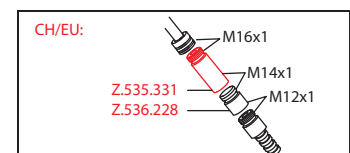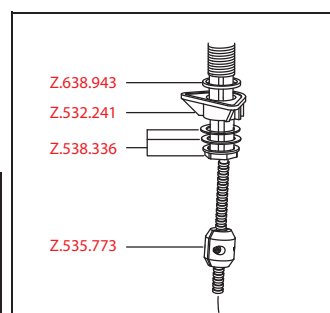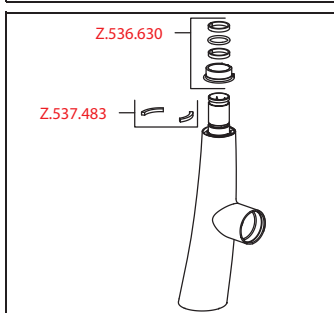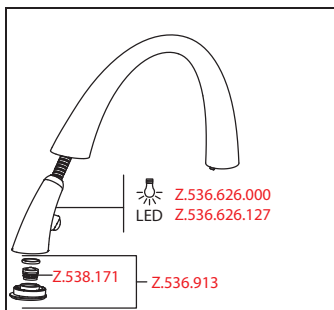

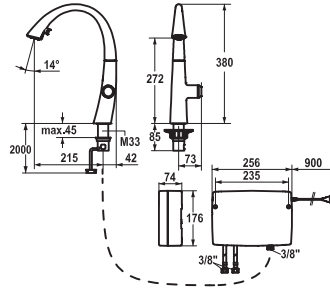







<b>FUN</b>	KWC-No.
<b>115.0583.552</b>	10.201.242.176FL
matt black, A 215, flexible connection hoses, mains receiver	


**Kitchen ■ with LEDShine, touch light PRO**

- IntelligentControl - electronic control
  - touch light PRO technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- Position of control unit only possible on the right side
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings

- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length
- SwivelStop - hose guide, swivelling 270°, limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material

Flow rate normal spray 9 l/min (3 bar)  
 Flow rate needle spray 10 l/min (3 bar)  
 Acoustic group I

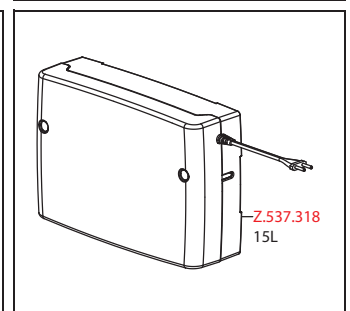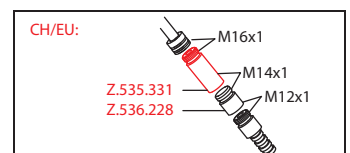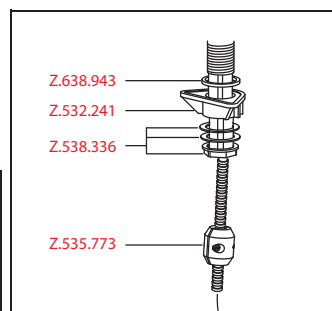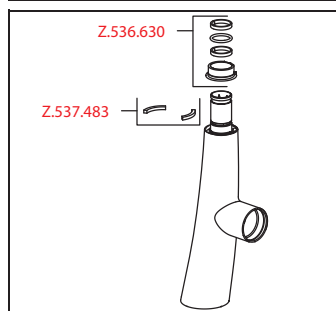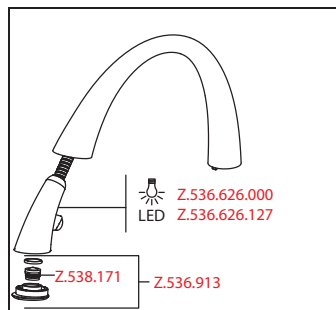

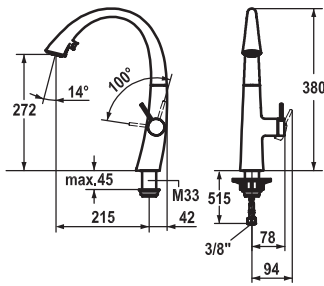

FUN	KWC-No.
<b>115.0307.911</b>	10.201.102.000FL
all chrome, A 215, flexible connection hoses	
<b>115.0308.235</b>	10.201.102.127FL
decor steel, A 215, flexible connection hoses	

**Lever mixer ■ Kitchen**







Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 500 mm pull-out length
  - hose surface to fit faucet surface
- SwivelStop - hose guide, swivelling 270° , limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)

Flow rate needle spray 9 l/min (3 bar)

Acoustic group II

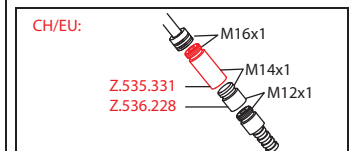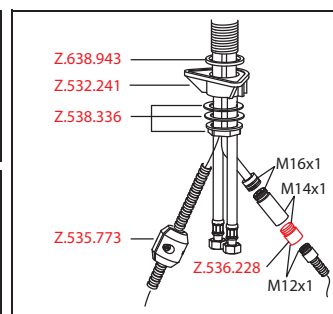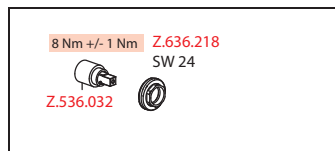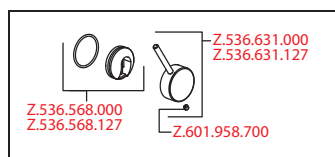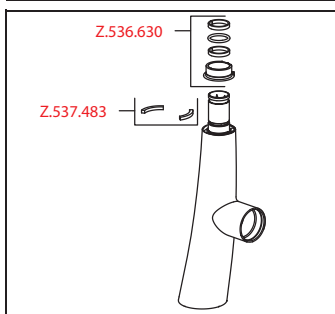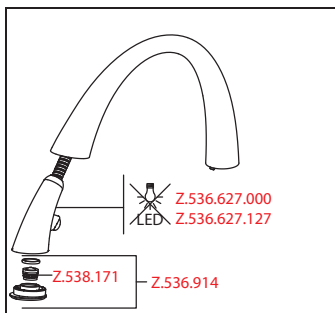

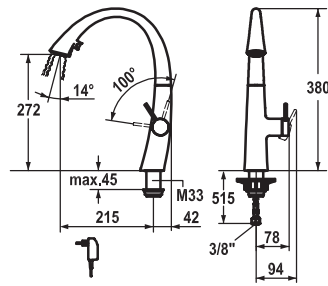

FUN	KWC-No.
<b>115.0307.913</b>	10.201.122.000FL
all chrome, A 215, flexible connection hoses, mains receiver	
<b>115.0308.233</b>	10.201.122.127FL
decor steel, A 215, flexible connection hoses, mains receiver	








**Lever mixer ■ Kitchen ■ with LEDShine**


Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length
  - hose surface to fit faucet surface

- SwivelStop - hose guide, swivelling 270° , limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate normal spray 8 l/min (3 bar)  
 Flow rate needle spray 9 l/min (3 bar)  
 Acoustic group II

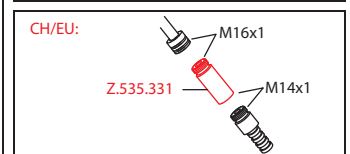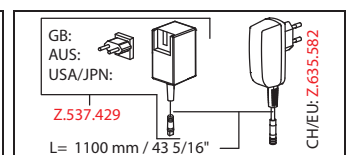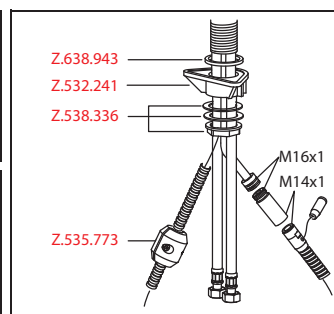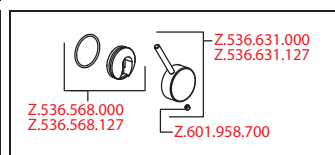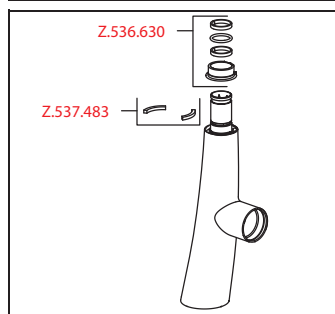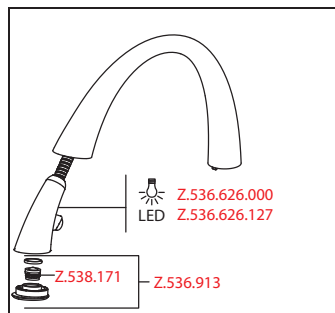

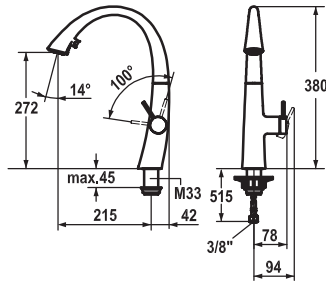

FUN

KWC-No.

**115.0583.579**

10.201.102.176FL

matt black, A 215, flexible connection hoses

### Lever mixer ■ Kitchen


#### Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 500 mm pull-out length
- SwivelStop - hose guide, swivelling 270° , limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)

Flow rate needle spray 9 l/min (3 bar)

Acoustic group II

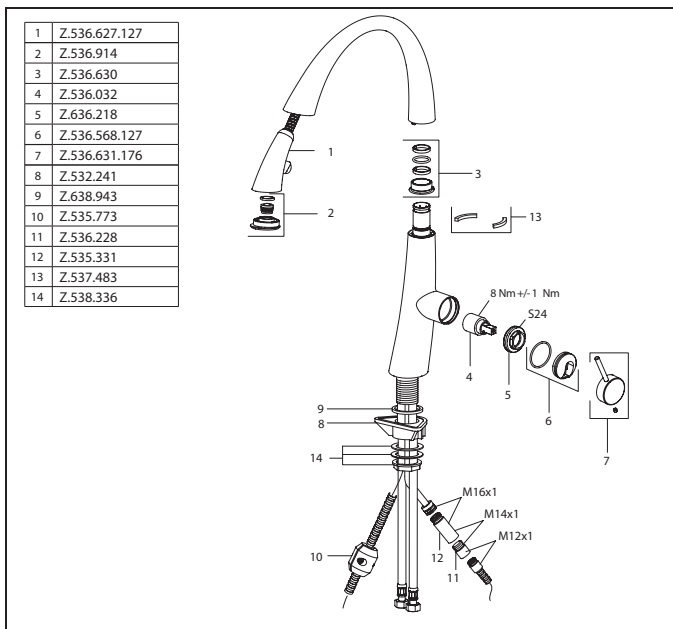

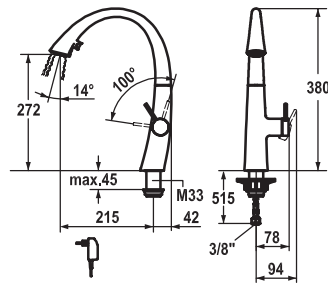

<b>FUN</b>	KWC-No.
<b>115.0583.596</b>	10.201.122.176FL
matt black, A 215, flexible connection hoses, mains receiver	


**Lever mixer ■ Kitchen ■ with LEDShine**

Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length

- SwivelStop - hose guide, swivelling 270° , limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate normal spray 8 l/min (3 bar)  
 Flow rate needle spray 9 l/min (3 bar)  
 Acoustic group II

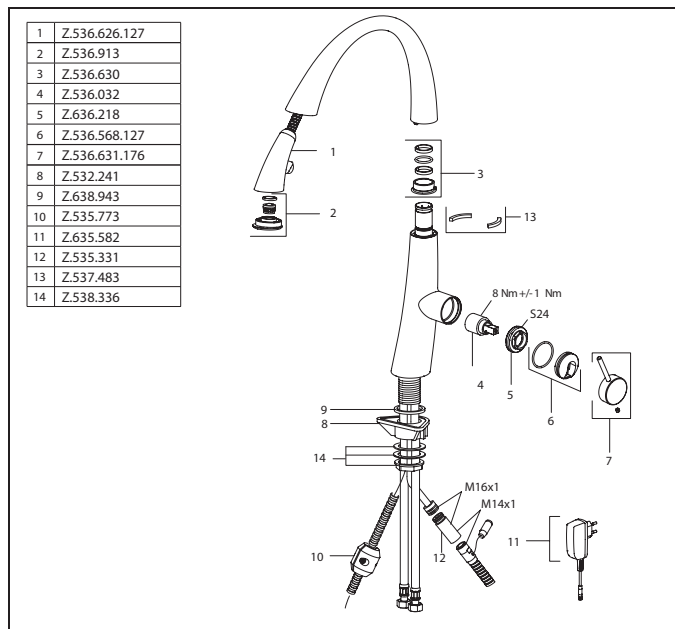



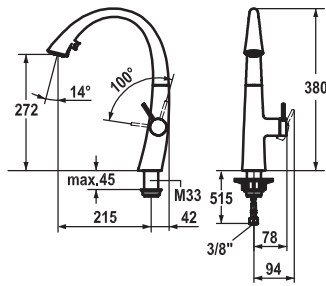

FUN	KWC-No.
<b>115.0340.020</b>	10.201.102.150FL
glacier white, A 215, flexible connection hoses	

### Lever mixer ■ Kitchen







#### Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 500 mm pull-out length
- SwivelStop - hose guide, swivelling 270°, limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)

Flow rate needle spray 9 l/min (3 bar)

Acoustic group II

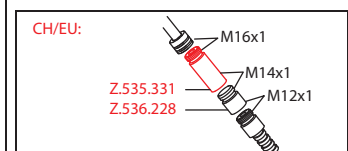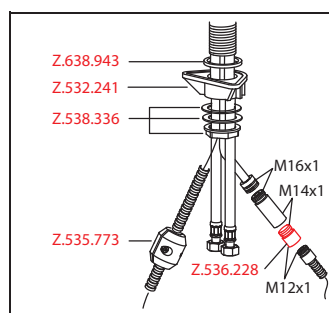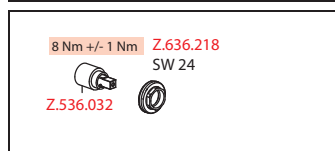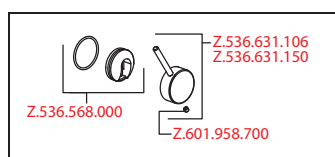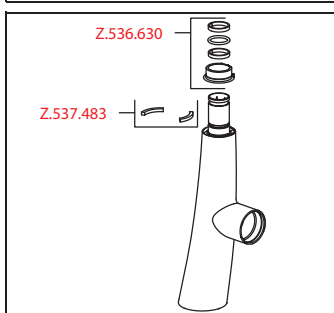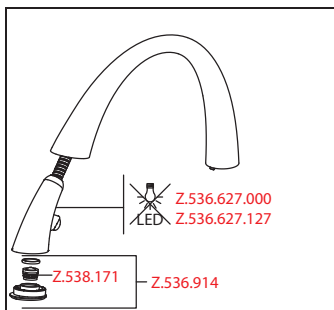

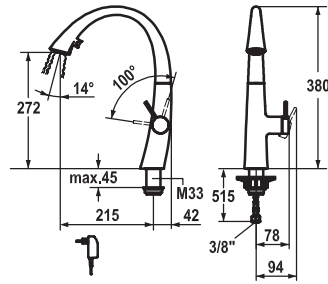

FUN	KWC-No.
<b>115.0340.014</b>	10.201.122.150FL
glacier white, A 215, flexible connection hoses, mains receiver	








**Lever mixer ■ Kitchen ■ with LEDShine**


Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length

- SwivelStop - hose guide, swivelling 270° , limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate normal spray 8 l/min (3 bar)  
 Flow rate needle spray 9 l/min (3 bar)  
 Acoustic group II

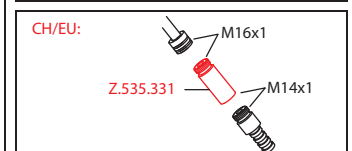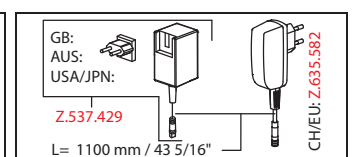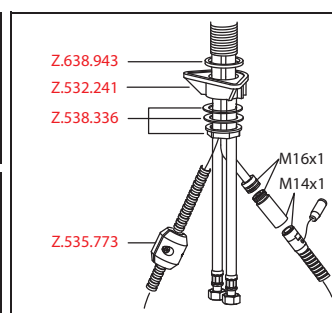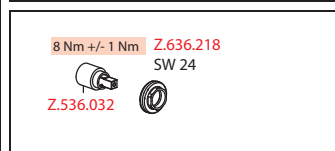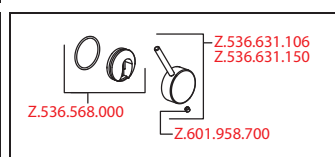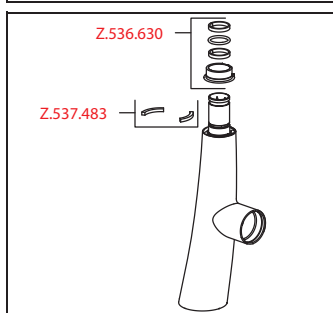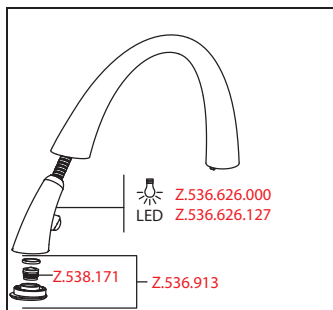

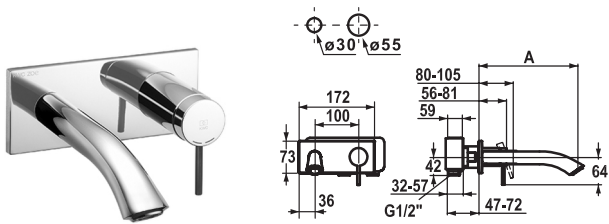






FUN	KWC-No.
<b>113.0360.379</b> all chrome, A 175, Trim kit	11.202.033.000
<b>113.0360.380</b> all chrome, A 225, Trim kit	11.202.034.000

**Trim kit ■ Lever mixer ■ Basin**

Trim kit Lever mixer

- Fixed spout
  - Neoperl® Caché®
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- To be ordered separately:
  - Unit for concealed installation 1/2" 39.193.400.931
- To be ordered separately (optional or if necessary):
  - Extension set 20 mm Z.536.333

Flow rate 5 l/min (3 bar)  
Acoustic group I

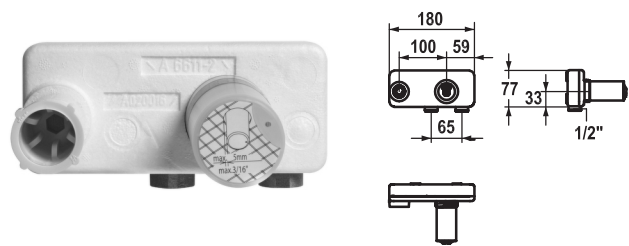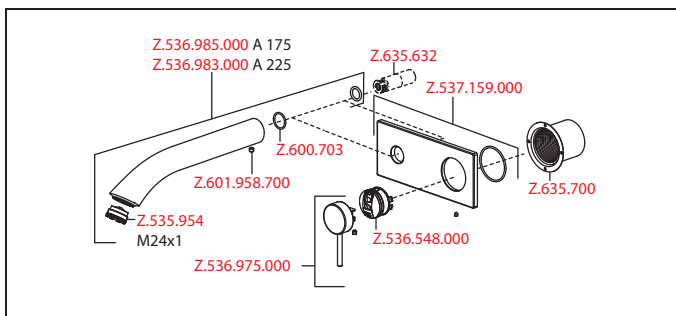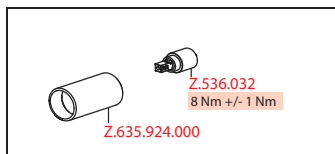


FUN	KWC-No.
<b>112.0308.149</b> 931 roh, Concealed unit	39.193.400.931


**Concealed unit**

Concealed unit wall two hole

- Connecting thread 1/2"
- To be ordered separately:
  - Installation kit Z.536.828
- Suitable for:
  - KWC AVA
  - KWC ZOE

Acoustic group I

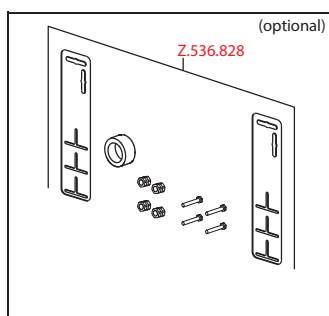




FUN	KWC-No.
<b>112.0362.929</b>	Z.536.828

Installation kit


- Suitable for:
  - Concealed unit wall two hole



FUN	KWC-No.
<b>119.0308.341</b> all chrome	Z.536.586.000
<b>119.0308.352</b> decor steel	Z.536.586.127

### Soap dispenser KWC ZOE


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700



FUN	KWC-No.
<b>119.0340.011</b> glacier white	Z.536.586.150

### Soap dispenser KWC ZOE

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700



FUN	KWC-No.
<b>119.0583.600</b> matt black	Z.536.586.176

### Soap dispenser KWC ZOE

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700