

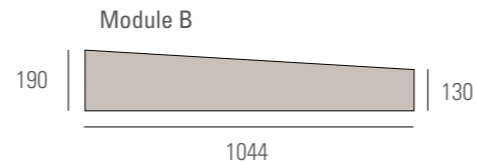
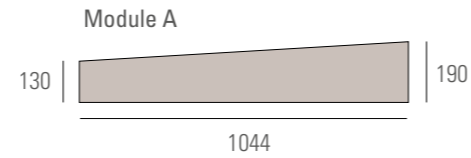


MEDOC

TOP LAYER THICKNESS: 3,5 mm
 SUPPORT THICKNESS: 9 mm
 TOTAL THICKNESS: 12,5 mm
 SUPPORT: BIRCH MULTILAYER
 WEIGHT: 9 kg/m²
 THERMAL RESISTANCE: 0,077 m²K / W
 INSTALLATION: GLUED-DOWN



INSTALLATION PATTERNS

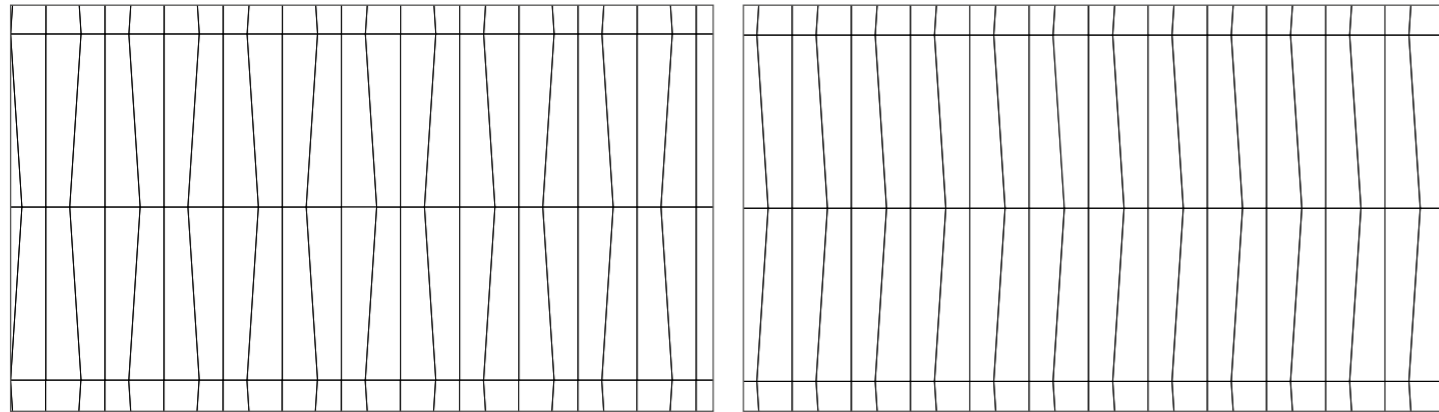

These elements are milled with groove profile. They interlock by means of solid wood loose tongues supplied with the material.

In order to lay this specific geometric pattern, boards of the same shape will be supplied half A and half B.

See technical sheet for more information on the installation patterns.

These products are suitable for underfloor heating and cooling system provided that strict instructions on temperature and humidity are fully complied with.

Product's features may change with respect to the information in this document. For update information please check the technical sheets available on www.listonegiordano.com.

We recommend to read the "General information" on page 4 and 5 during the selection and purchasing phase focusing on the installation, use and maintenance instructions available on www.listonegiordano.com.



TOP LAYER	FEATURE	SURFACE	FINISH	130-190 total thickness 12,5 mm top layer thickness 3,5 mm length 1044 mm
OAK	Pienza 1405	filo di lama	Oleonature	
	San Gimignano 1311	filo di lama	Oleonature	
	Montalcino 1118	filo di lama	Oleonature	
	Bagno Vignoni 1262	filo di lama	Oleonature	
	Erice 1312	filo di lama	Oleonature	

TERRE DI VIGNA by PASSONI DESIGN®		The wood floor is tinged with a special color obtained by distillation from wine in collaboration with Passoni Design. The selected grape pomace combined with natural pigments endow Medoc with a unique color depth. A patented, cutting-edge and fully natural color technology is the result of the passionate research carried out by the Passoni laboratories.		130-190 total thickness 12,5 mm top layer thickness 3,5 mm length 1044 mm
OAK	Mirantico	filo di lama	Oleonature	

Cut-sawn effect of the surface

These products emphasize a natural colour tone variegation, a marked and widespread presence of filled and open fractures, as well as consolidated, tight and partially filled knots. A detailed description of the grade is available on the dedicated page of the website www.listonegiordano.com.

Roughness of the surface and small splintering may trap the cleaning cloths. Please be aware of this roughness and

splintering when walking barefeet on the floor.

Minimum quantity is 25 m². Smaller quantities are to be evaluated upon request. If accepted 300 € will be charged as setup **fixed costs**.

The delivered and invoiced quantity may exceed the one originally ordered with 4 m² or 4% tolerance (the highest between the two). **We require 40%**

advance payment in order to start production.

Before placing the order please always check availability and delivery time with the sales assistants.