


KWC

ONO

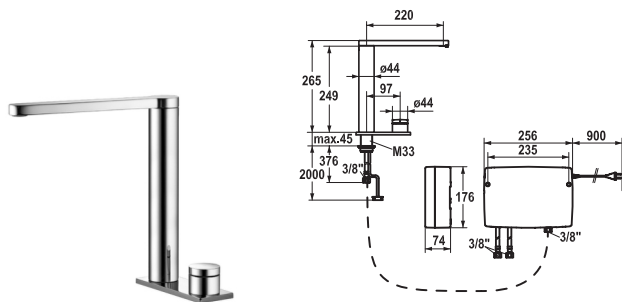

FUN	KWC-No.
115.0308.219	10.651.022.000FL
all chrome, A 220, flexible connection hoses, mains receiver	


Kitchen ■ with LED-technology

IntelligentControl - electronic control

- touch light PRO technology
- touch'n'flow 1-2-3
 - 3 preset temperatures and flow rates
- Microprocessor-control
 - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- Swivel spout 360°
 - Neoperl® SLIM®
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
 - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
 - Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately (optional or if necessary):
 - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 12 l/min (3 bar)
Acoustic group I

www.kwc.com

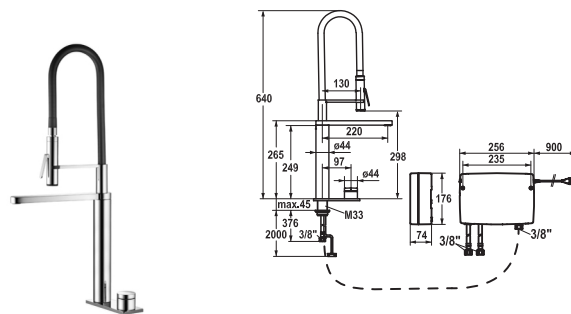


FUN	KWC-No.
115.0308.222	10.651.122.000FL
all chrome, A 220, flexible connection hoses, mains receiver	

Kitchen ■ with LED-technology

IntelligentControl - electronic control

- touch light PRO technology
- HighFlex patented spring hose technology
- touch'n'flow 1-2-3
 - 3 preset temperatures and flow rates
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
 - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- EasyLock - a pull-out spray that easily slides back into place
- Swivel spout 360°
 - Neoperl® SLIM®
- Professional spray 360° turn
 - SprayClean - easy to clean and actively prevents limescale buildup
 - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
 - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
 - Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately (optional or if necessary):
 - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 8 l/min (3 bar)
Spray: Flow rate 4 l/min (3 bar)
Acoustic group I

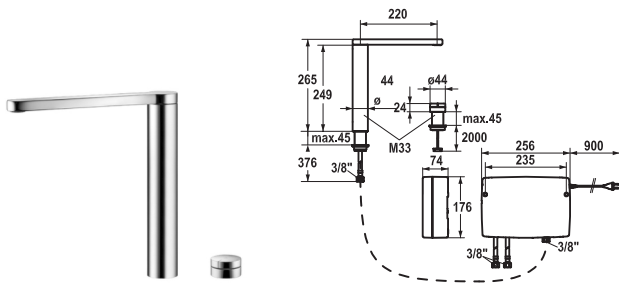


FUN	KWC-No.
115.0308.217	10.652.012.000FL
all chrome, A 220, flexible connection hoses, mains receiver	

Kitchen ■ with LED-technology

IntelligentControl - electronic control

- touch light PRO technology
- touch'n'flow 1-2-3
 - 3 preset temperatures and flow rates
- 2-hole
- Microprocessor-control
 - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- Swivel spout 360°
 - Neoperl® SLIM®
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
 - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
 - Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately (optional or if necessary):
 - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 12 l/min (3 bar)
Acoustic group I

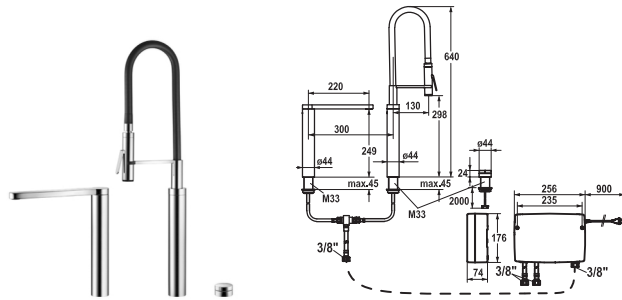


FUN	KWC-No.
115.0308.220	10.653.112.000FL
all chrome, A 220, flexible connection hoses, mains receiver	

Kitchen ■ with LED-technology

IntelligentControl - electronic control

- touch light PRO technology
- HighFlex patented spring hose technology
- touch'n'flow 1-2-3
 - 3 preset temperatures and flow rates
- 3-hole
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
 - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- EasyLock - a pull-out spray that easily slides back into place
- Swivel spout 360°
 - Neoperl® SLIM®
- Professional spray 360° turn
 - SprayClean - easy to clean and actively prevents limescale buildup
 - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
 - Mains receiver 100-240 V / operating voltage / cable length 900 mm
 - Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately (optional or if necessary):
 - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 9 l/min (3 bar)
Spray: Flow rate 4 l/min (3 bar)
Acoustic group I

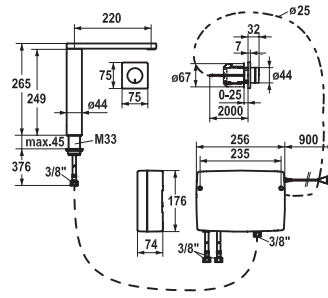

FUN	KWC-No.
115.0308.218	10.651.032.000FL
all chrome, A 220, flexible connection hoses, mains receiver	
112.0308.152	Z.636.183
Concealed unit	

Kitchen ■ with LED-technology

IntelligentControl - electronic control

– touch light PRO technology

■ touch'n'flow 1-2-3

– 3 preset temperatures and flow rates

■ Microprocessor-control

– touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved

– touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved

– touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved

– with cleaning programme

– duration of water flow - safety indication: switch off automatically after 10 minutes

– temperature limit can be adjusted

– hot water disinfection (5 minutes) can be adjusted

– can be restored to factory settings

■ Swivel spout 360°

– Neoperl® SLIM®

■ OptimalSpace - ample space for washing or working

■ touch light PRO control unit, maintenance-free

– up-to-date microprocessor and drive technology

– tried-and-tested valve technology

– incl. installation materials

– designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)

■ Flexible connection hoses 3/8"

■ Fastening by means of threaded sleeve M33 x 1.5

■ Mounting hole size 35 mm

■ Scope of delivery:

– Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm

– Control unit and wired operating unit / cable length 2000 mm

■ To be ordered separately:


– Rough in for operating unit Z.636.183

■ To be ordered separately (optional or if necessary):

– Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material

– KWC ONO touch light PRO wireless operating unit Z.536.351.000

■ Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

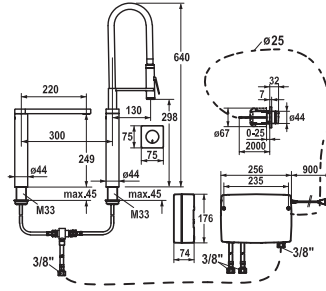

FUN	KWC-No.
115.0308.221	10.652.132.000FL
all chrome, A 220, flexible connection hoses, mains receiver	
112.0308.152	Z.636.183
Concealed unit	

Kitchen ■ with LED-technology

IntelligentControl - electronic control

- touch light PRO technology
- HighFlex patented spring hose technology
- touch'n'flow 1-2-3
 - 3 preset temperatures and flow rates
- 2-hole
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
 - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- EasyLock - a pull-out spray that easily slides back into place
- Swivel spout 360°
 - Neoperl® SLIM®
- Professional spray 360° turn
 - SprayClean - easy to clean and actively prevents limescale buildup
 - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm


■ Scope of delivery:

- Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - Rough in for operating unit Z.636.183
- To be ordered separately (optional or if necessary):
 - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 9 l/min (3 bar)

Spray: Flow rate 4 l/min (3 bar)

Acoustic group I

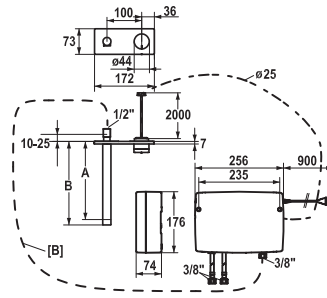

FUN	KWC-No.
115.0308.223	11.654.003.000
all chrome, A 175, mains receiver, Trim kit	
115.0308.224	11.654.004.000
all chrome, A 225, mains receiver, Trim kit	
112.0308.150	39.004.500.931
Concealed unit	

Trim kit ■ Basin ■ with LED-technology

IntelligentControl - electronic control

– touch light PRO technology

■ touch'n'flow 1-2-3

– 3 preset temperatures and flow rates

■ Microprocessor-control

– touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved

– touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved

– touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved

– with cleaning programme

– duration of water flow - safety indication: switch off automatically after 10 minutes

– temperature limit can be adjusted

– hot water disinfection (5 minutes) can be adjusted

– can be restored to factory settings

■ Fixed spout

– Neoperl® SLIM®

■ OptimalSpace - ample space for washing or working

■ touch light PRO control unit, maintenance-free

– up-to-date microprocessor and drive technology

– tried-and-tested valve technology

– incl. installation materials

– designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)

■ Connecting thread 1/2"

– [B] - Water guidance from control unit to spout: responsibility of client

■ Flexible connection hoses 3/8"

■ Scope of delivery:

– Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm

– Control unit and wired operating unit / cable length 2000 mm

■ To be ordered separately:


– Unit for concealed installation 39.004.500.931

■ To be ordered separately (optional or if necessary):

– Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material

– KWC ONO touch light PRO wireless operating unit Z.536.351.000

■ Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

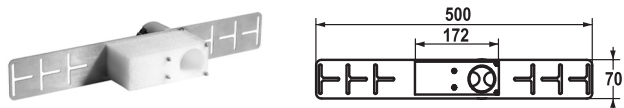

FUN	KWC-No.
112.0308.150	39.004.500.931
Concealed unit	

Concealed unit wall two hole



FUN	KWC-No.
112.0308.152	Z.636.183
Concealed unit	


Rough in for touch light PRO operating unit, plastic suitable for installation on brickwork or cavity walls




FUN	KWC-No.
112.0308.151	Z.536.351.000
all chrome, mains receiver	

KWC ONO touch light PRO wireless operating unit, with charging station
rechargeable battery life 3-4 months

- Scope of delivery:
 - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

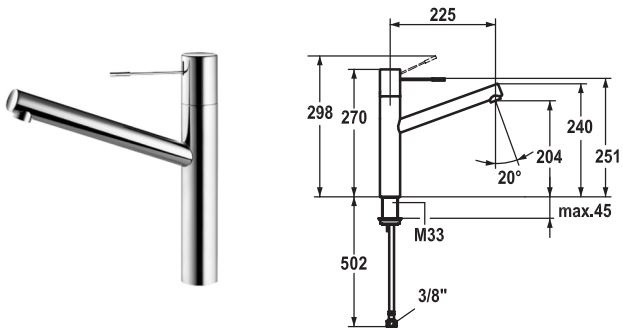

FUN	KWC-No.
115.0308.190	10.151.023.000FL
all chrome, A 225, flexible connection hoses	
115.0308.184	10.151.023.700FL
stainless steel, A 225, flexible connection hoses	

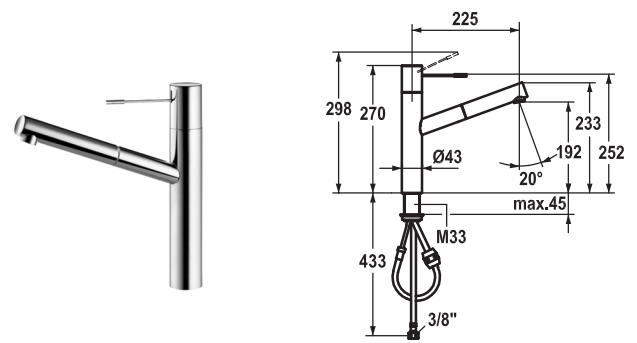

FUN	KWC-No.
115.0308.198	10.151.113.000FL
all chrome, A 225, flexible connection hoses	
115.0308.199	10.151.113.700FL
stainless steel, A 225, flexible connection hoses	

Lever mixer ■ Kitchen

Lever mixer


- Surgical-grade hardened stainless steel lever
- Swivel spout 270°
 - Neoperl® Caché®
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Lever mixer ■ Kitchen


Lever mixer


- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator
 - Neoperl® Cascade®
 - up to 700 mm pull-out length
 - hose surface to fit faucet surface
- Hose guide, swivelling 105°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I

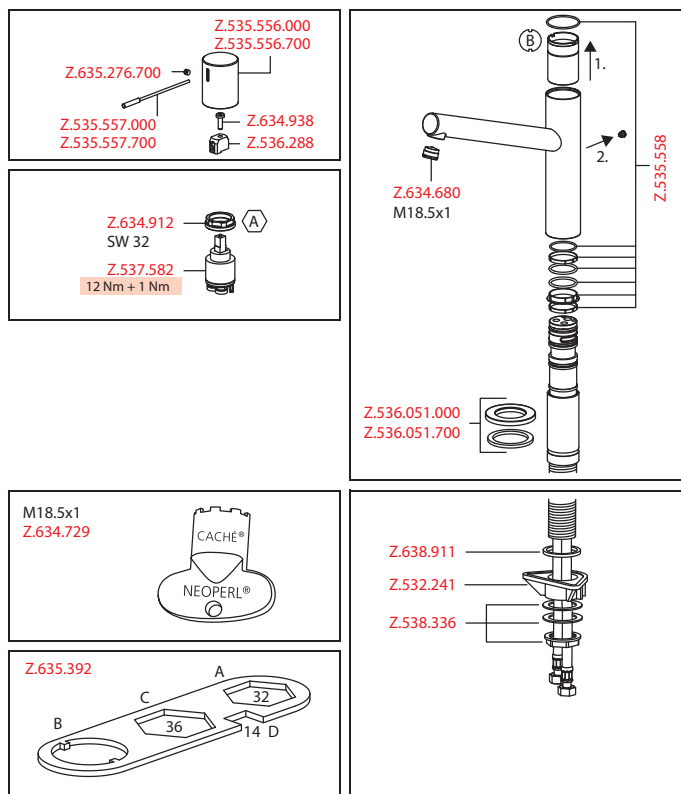

Flow rate 10 l/min (3 bar)
Acoustic group I

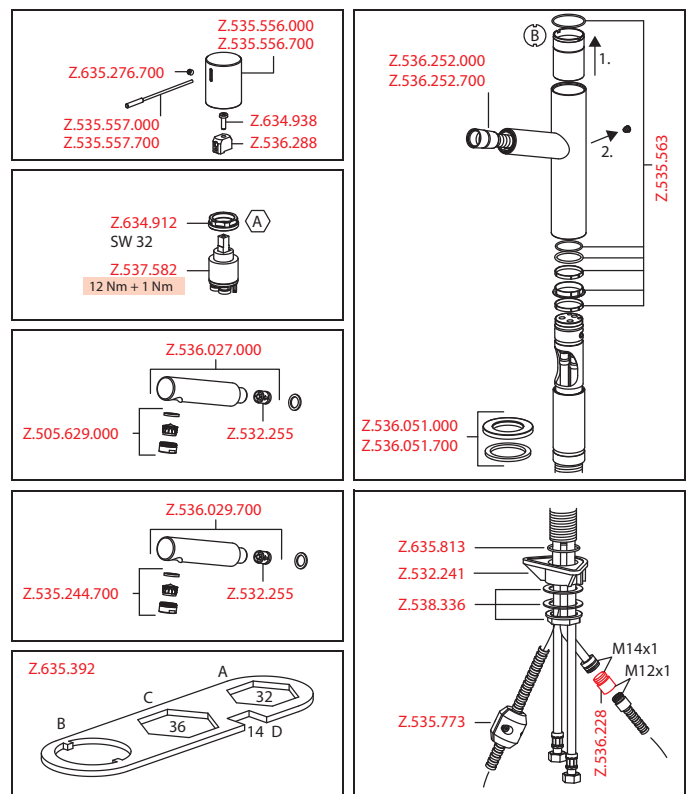

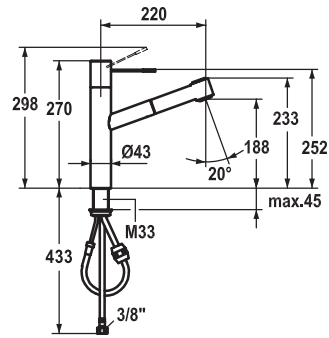

FUN	KWC-No.
115.0308.177	10.151.033.000FL
all chrome, A 220, flexible connection hoses	
115.0308.169	10.151.033.700FL
stainless steel, A 220, flexible connection hoses	

Lever mixer ■ Kitchen


Lever mixer



- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
 - SprayClean - easy to clean and actively prevents limescale buildup
 - up to 700 mm pull-out length
 - PowerClean - needle spray mode, with automatic diverter reset
 - hose surface to fit faucet surface
- Hose guide, swivelling 105°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 12 l/min (3 bar)


Flow rate needle spray 13 l/min (3 bar)

Acoustic group II

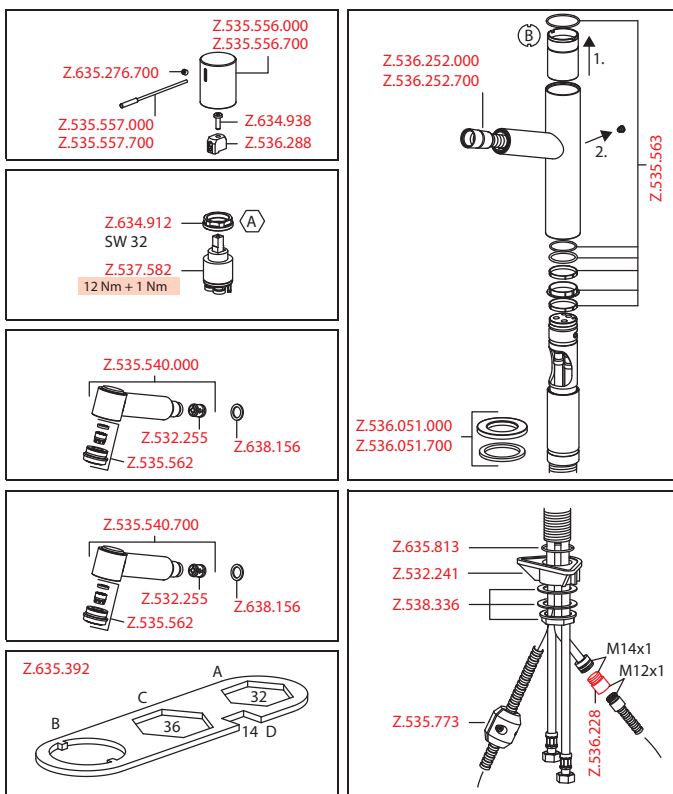

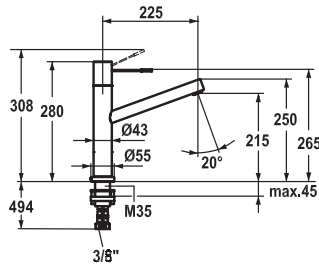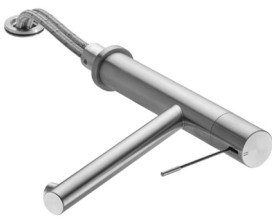

FUN	KWC-No.
115.0308.254	10.151.043.700FL
stainless steel, A 225, flexible connection hoses	

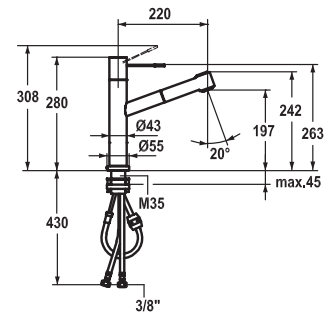







FUN	KWC-No.
115.0308.255	10.151.053.700FL
stainless steel, A 220, flexible connection hoses	

Lever mixer ■ Kitchen ■ detachable

Lever mixer

- Detachable for installation below windows - detached 55 mm
- Surgical-grade hardened stainless steel lever
- Intrinsically safe against backflow
- Swivel spout 270°
 - Neoperl® Caché®
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size ø35 - 37 mm

Flow rate 11 l/min (3 bar)
Acoustic group I

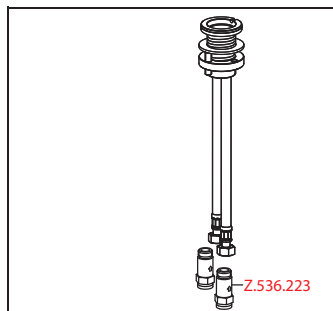
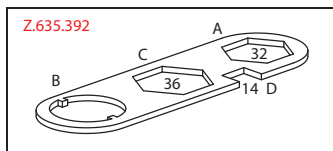

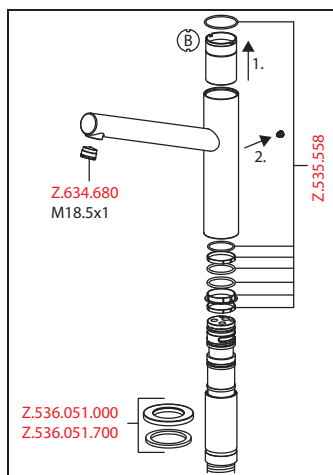
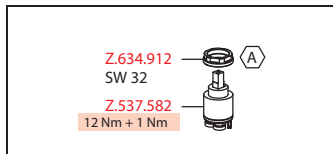
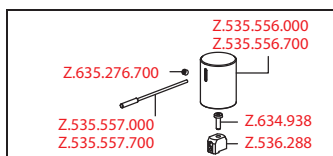



Lever mixer ■ Kitchen ■ detachable

Lever mixer

- Detachable for installation below windows - detached 55 mm
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
 - SprayClean - easy to clean and actively prevents limescale buildup
 - up to 700 mm pull-out length
 - PowerClean - needle spray mode, with automatic diverter reset
 - hose surface to fit faucet surface
- Hose guide, swivelling 105°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size ø35 - 37 mm

Flow rate normal spray 9 l/min (3 bar)
Flow rate needle spray 9 l/min (3 bar)
Acoustic group II

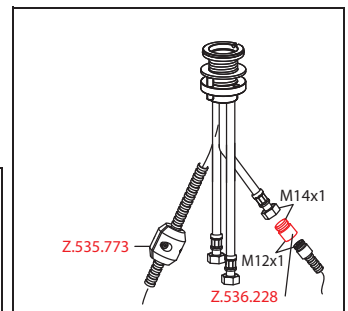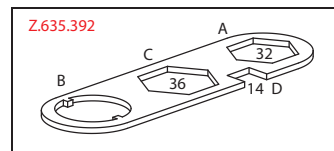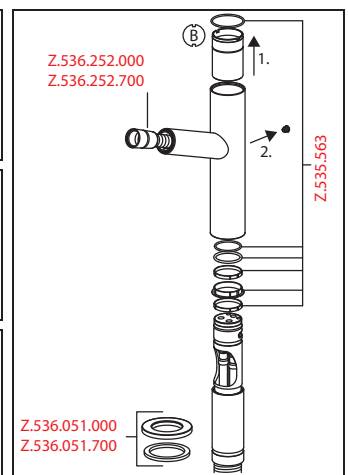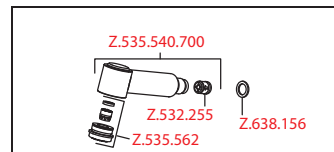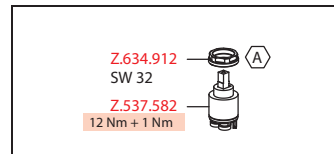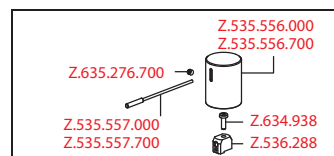

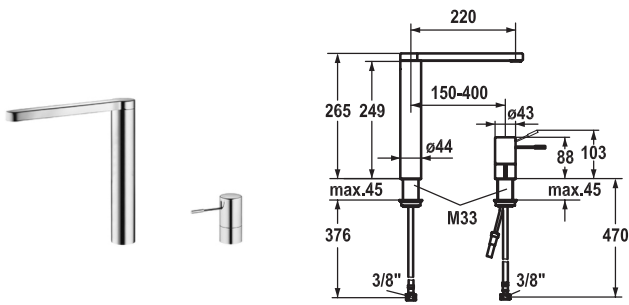



FUN	KWC-No.
115.0308.196	10.152.413.000FL
all chrome, A 220, flexible connection hoses	

Lever mixer ■ Kitchen

Lever mixer

- 2-hole
- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- Swivel spout 360°
 - Neoperl® SLIM®
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group II

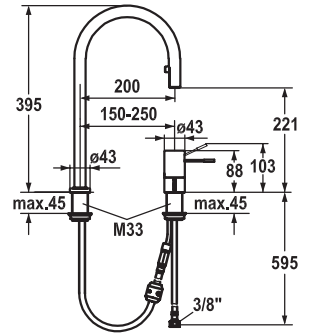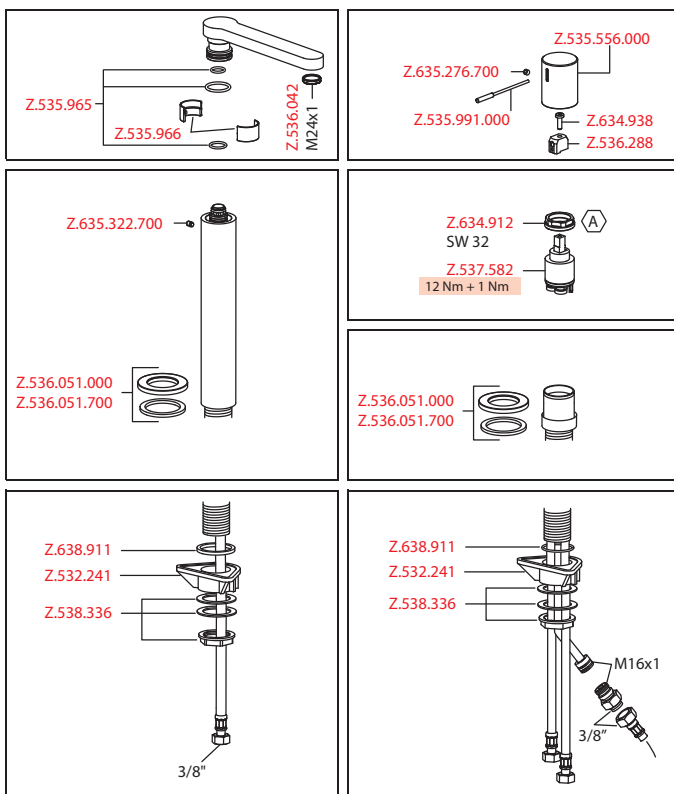


FUN	KWC-No.
115.0308.194	10.152.322.000FL
all chrome, A 200, flexible connection hoses	


Lever mixer ■ Kitchen

Lever mixer


- 2-hole
- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
 - Neoperl® Caché®
 - hose surface to fit faucet surface
- Hose guide, swivelling 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 10 l/min (3 bar)
Acoustic group II

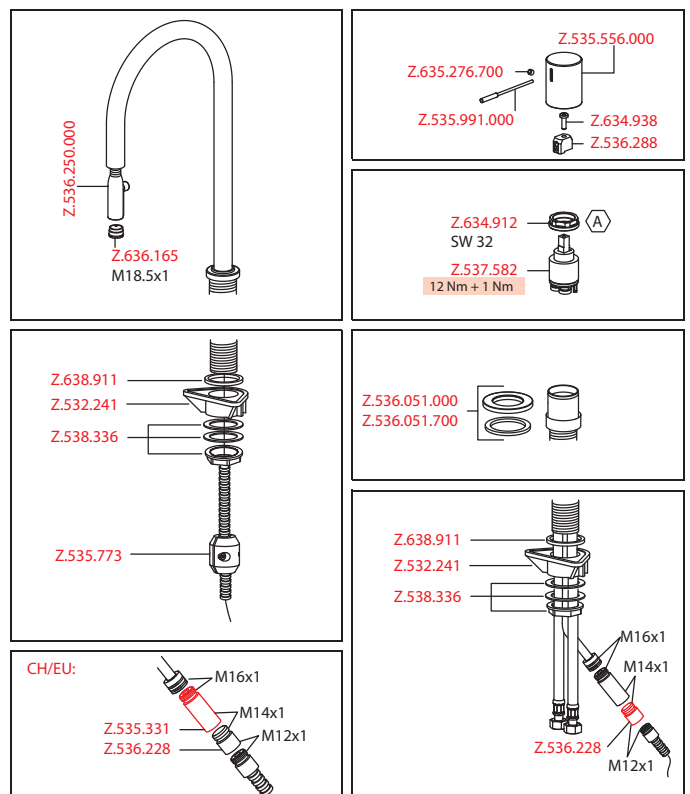

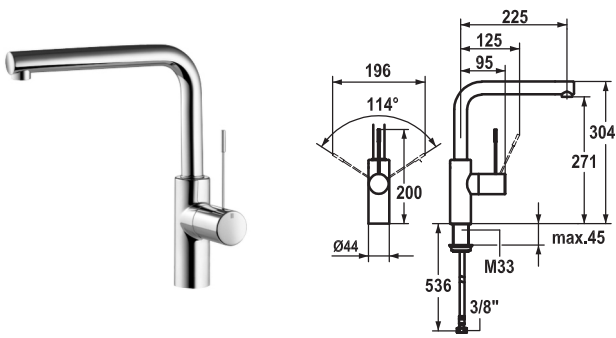

FUN	KWC-No.
115.0308.193	10.151.013.000FL
all chrome, A 225, flexible connection hoses	

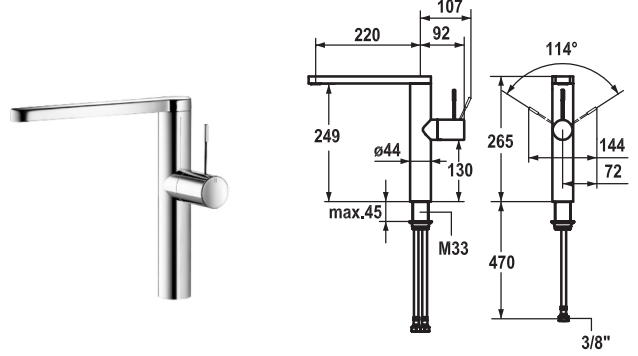

FUN	KWC-No.
115.0308.170	10.151.413.000FL
all chrome, A 220, flexible connection hoses	
115.0308.208	10.151.413.700FL
stainless steel, A 220, flexible connection hoses	

Lever mixer ■ Kitchen

Lever mixer

- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- Swivel spout 360°
 - Neoperl® Caché®
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
 - Short lever, L 70 mm Z.535.995


Lever mixer ■ Kitchen

Lever mixer

- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- Swivel spout 360°
 - Neoperl® SLIM®
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I

Flow rate 11 l/min (3 bar)
Acoustic group II

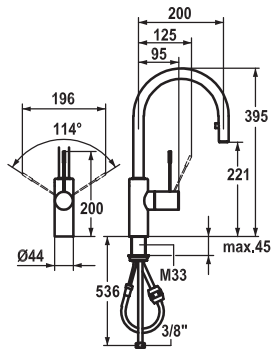



FUN	KWC-No.
115.0308.191	10.151.102.000FL
all chrome, A 200, flexible connection hoses	
115.0308.185	10.151.102.700FL
stainless steel, A 200, flexible connection hoses	

Lever mixer ■ Kitchen

Lever mixer

- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
 - Neoperl® Caché®
 - up to 700 mm pull-out length
 - hose surface to fit faucet surface
- Hose guide, swivelling 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
 - Short lever, L 70 mm Z.535.995

Flow rate 10 l/min (3 bar)
Acoustic group II

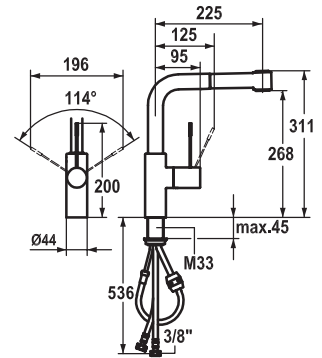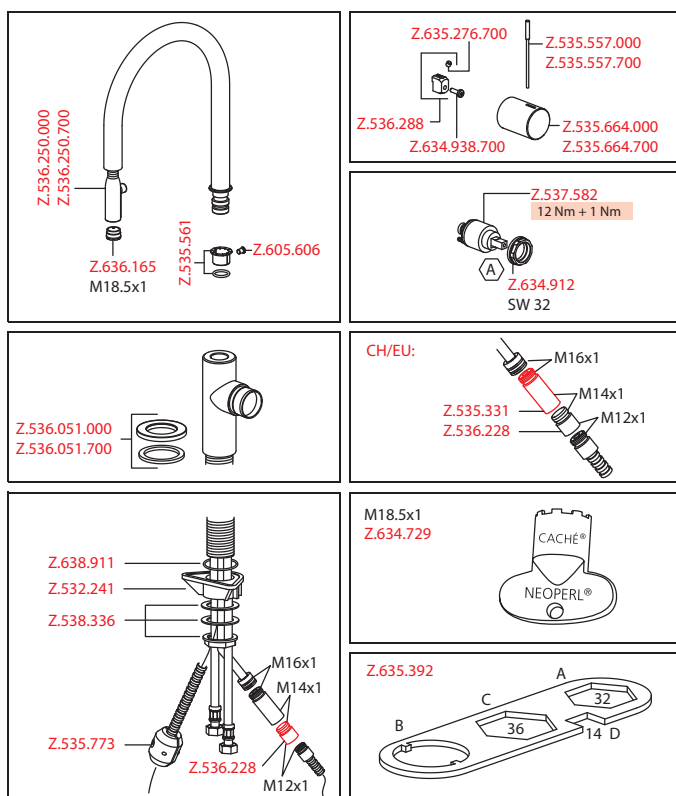


FUN	KWC-No.
115.0308.192	10.151.003.000FL
all chrome, A 225, flexible connection hoses	


Lever mixer ■ Kitchen

Lever mixer

- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
 - SprayClean - easy to clean and actively prevents limescale buildup
 - up to 700 mm pull-out length
 - PowerClean - needle spray mode, with automatic diverter reset
 - hose surface to fit faucet surface
- Hose guide, swivelling 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
 - Short lever, L 70 mm Z.535.995

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 13 l/min (3 bar)
Acoustic group II

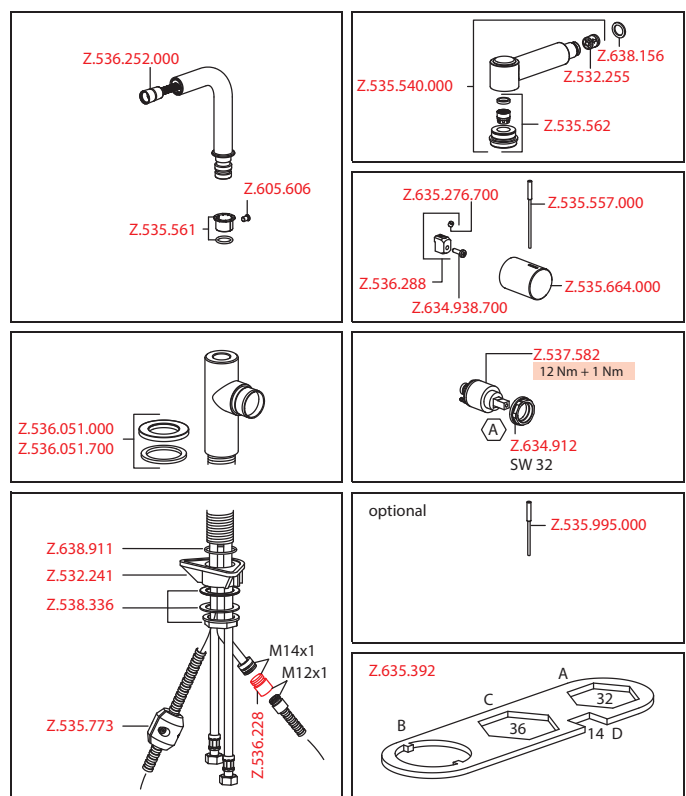

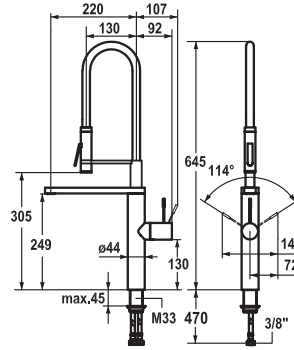

FUN	KWC-No.
115.0307.905	10.151.423.000FL
all chrome, A 220, flexible connection hoses	
115.0308.207	10.151.423.700FL
stainless steel, A 220, flexible connection hoses	


Lever mixer ■ Kitchen


Lever mixer

- HighFlex patented spring hose technology
- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Integrated vacuum diversion
- EasyLock - a pull-out spray that easily slides back into place
- Swivel spout 360°
 - Neoperl® SLIM®

- Professional spray 360° turn
 - SprayClean - easy to clean and actively prevents limescale buildup
 - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
 - Spray holder Z.535.963

Flow rate 11 l/min (3 bar)
 Spray: Flow rate 3 l/min (3 bar)
 Acoustic group I

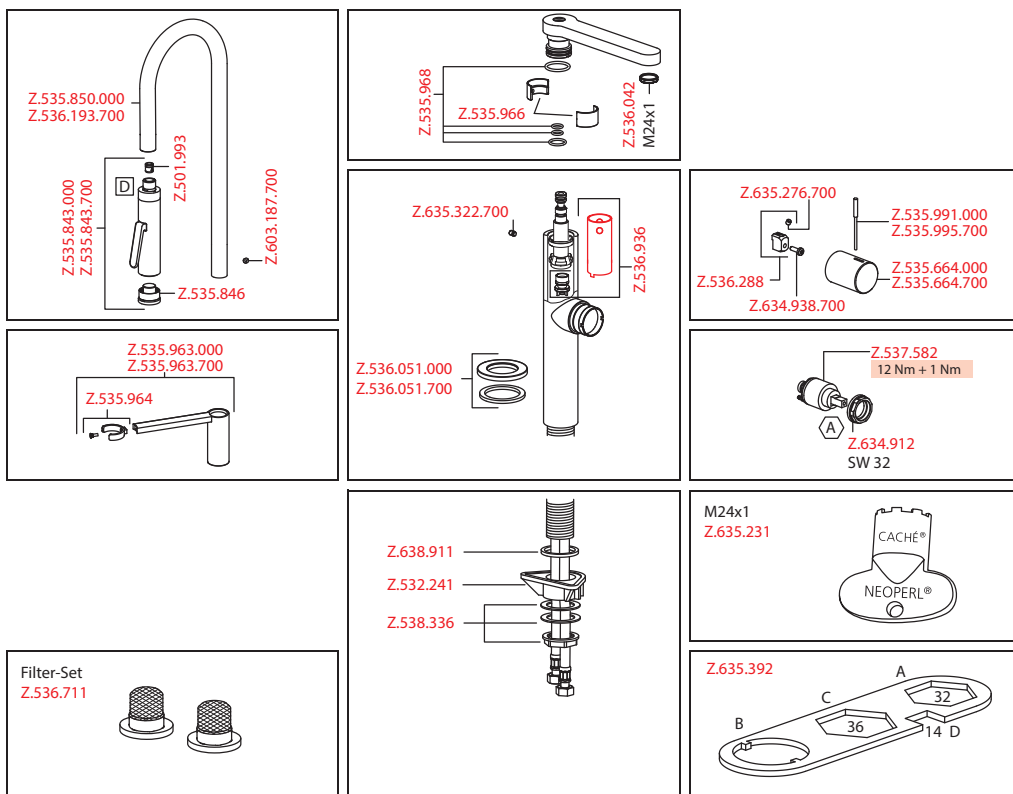

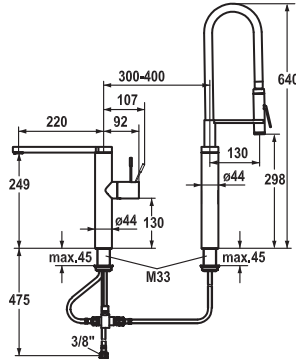

FUN	KWC-No.
115.0308.195	10.152.423.000FL
all chrome, A 220, flexible connection hoses	


Lever mixer ■ Kitchen


Lever mixer

- HighFlex patented spring hose technology
- 2-hole
- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Integrated vacuum diversion
- EasyLock - a pull-out spray that easily slides back into place
- Swivel spout 360°
 - Neoperl® SLIM®

- Professional spray 360° turn
 - SprayClean - easy to clean and actively prevents limescale buildup
 - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
 - Spray holder Z.535.963

Flow rate 8 l/min (3 bar)
 Spray: Flow rate 3 l/min (3 bar)
 Acoustic group I

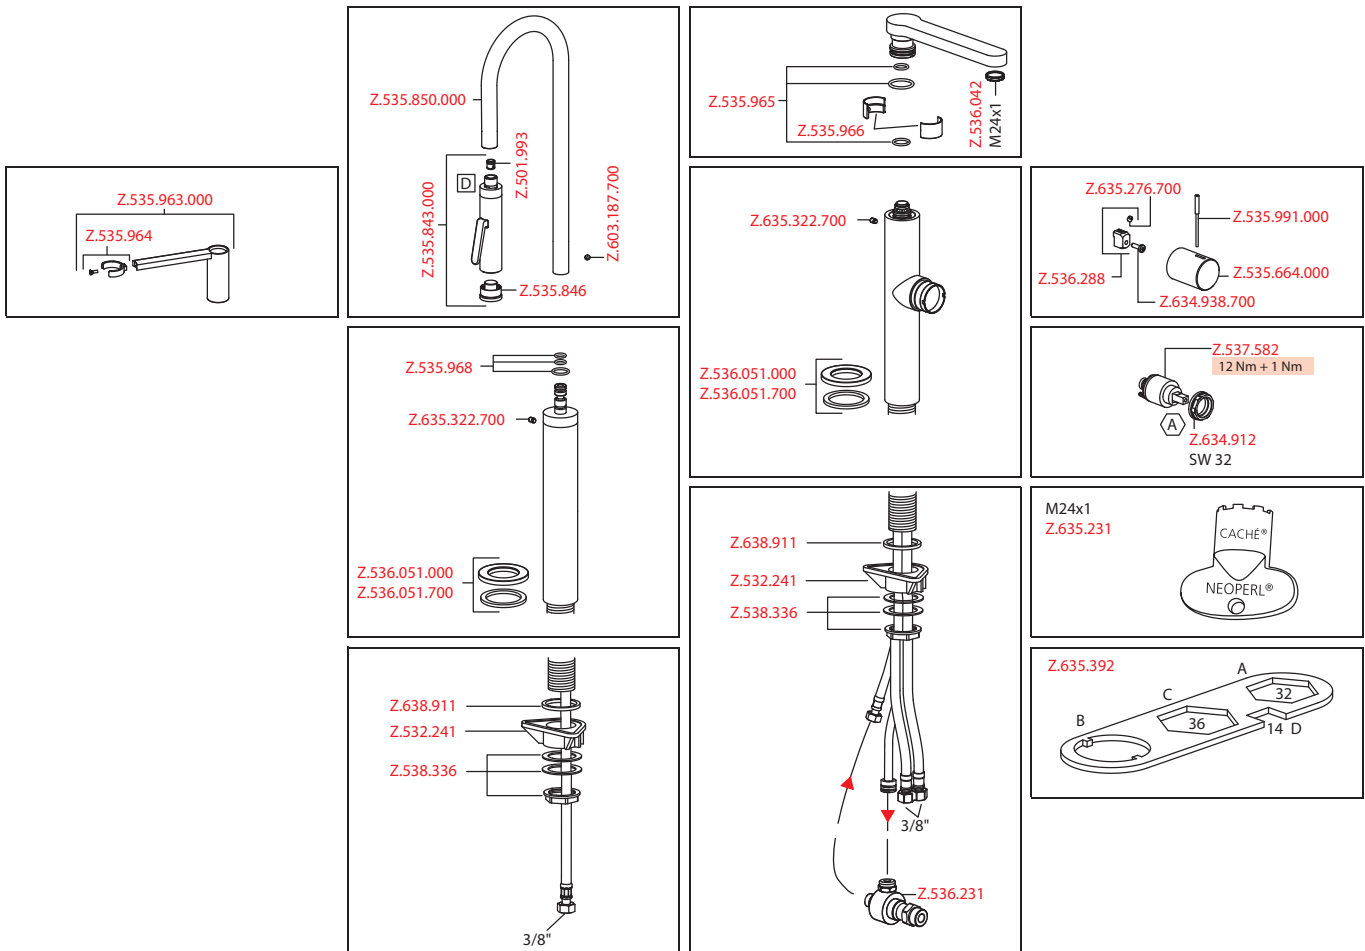

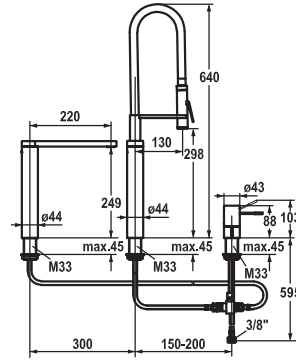

FUN	KWC-No.
115.0308.197	10.153.423.000FL
all chrome, A 220, flexible connection hoses	

Lever mixer ■ Kitchen

Lever mixer


- HighFlex patented spring hose technology
- 3-hole
- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Integrated vacuum diversion
- EasyLock - a pull-out spray that easily slides back into place
- Swivel spout 360°
 - Neoperl® SLIM®


- Professional spray 360° turn
 - SprayClean - easy to clean and actively prevents limescale buildup
 - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
 - with ceramic discs
 - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
 - Spray holder Z.535.963

Flow rate 8 l/min (3 bar)

Spray: Flow rate 3 l/min (3 bar)

Acoustic group I

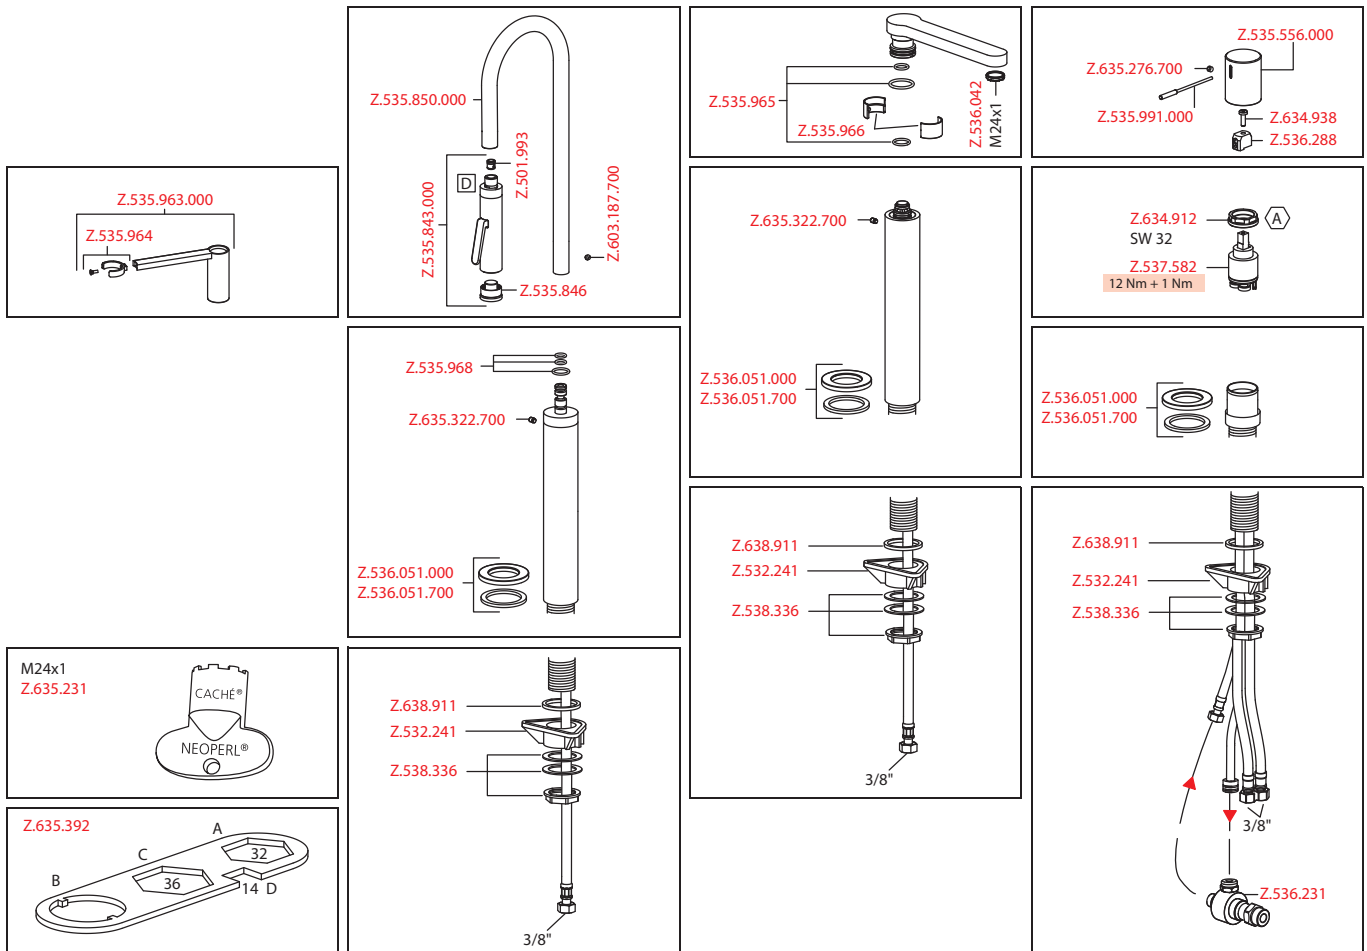

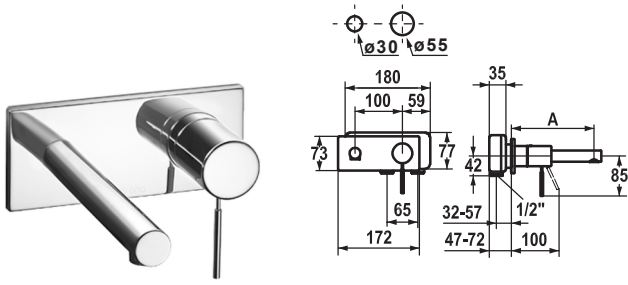






FUN	KWC-No.
115.0308.178 all chrome, A 175, Trim kit	11.152.033.000
115.0308.179 all chrome, A 225, Trim kit	11.152.034.000

Trim kit ■ Lever mixer ■ Basin

Trim kit Lever mixer

- Surgical-grade hardened stainless steel lever
- Fixed spout
 - Neoperl® Caché®
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- To be ordered separately:
 - Unit for concealed installation ½" 39.151.400.931
- To be ordered separately (optional or if necessary):
 - Extension set 20 mm Z.536.333

Flow rate 5 l/min (3 bar)
Acoustic group I

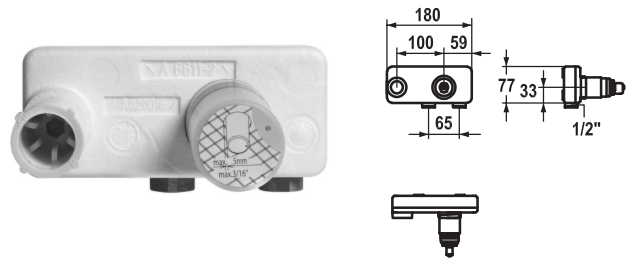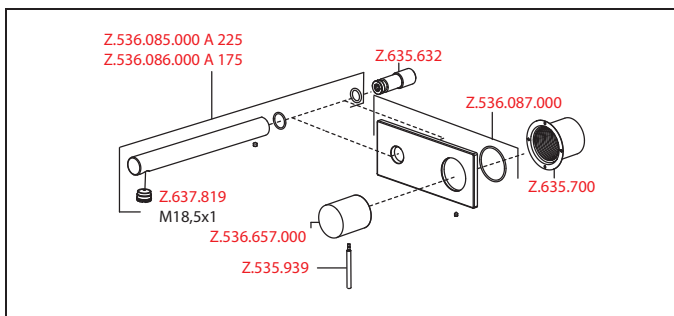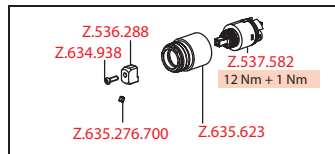



FUN	KWC-No.
112.0308.148 all chrome, Concealed unit	39.151.400.931

Concealed unit

Concealed unit wall two hole

- Connecting thread ½"
- To be ordered separately:
 - Installation kit Z.536.828
- Suitable for:
 - KWC ONO

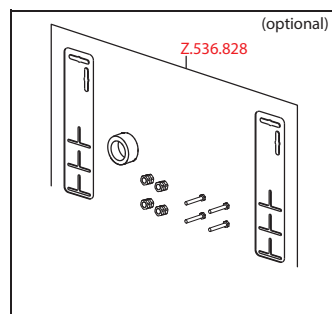




FUN	KWC-No.
112.0362.929	Z.536.828

Installation kit

- Suitable for:
 - Concealed unit wall two hole


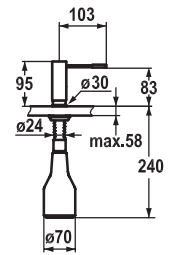


FUN	KWC-No.
119.0307.908	Z.536.060.000
all chrome	
119.0308.343	Z.536.060.700
stainless steel	

Soap dispensers

Soap dispenser KWC ONO

- Easily refillable from top without disassembly
- Mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - Pump
 - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
 - Escutcheon Z.536.291.000 or Z.536.292.700

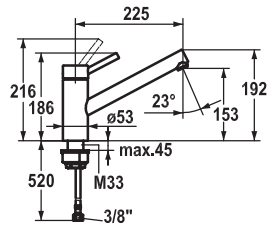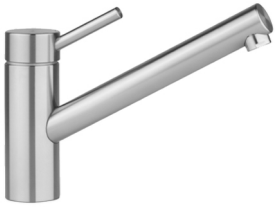

FUN

KWC-No.

115.0315.697

10.271.023.700FL

stainless steel, A 225, flexible connection hoses

Lever mixer ■ Kitchen

Lever mixer

- Swivel spout 160°
 - Neoperl® Cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)

Acoustic group I

