

SLIDE



NATURAL GENIUS



TOP LAYER	FEATURE	FINISH	total thickness 13 mm top layer thickness 1 mm
OAK	Michelangelo ⁽¹⁾	Naturplus2	

TOP LAYER	FEATURE	SURFACE	FINISH	total thickness 12,5 mm top layer thickness 3,5 mm
	Michelangelo ⁽¹⁾		Naturplus2	
OAK	Michelangelo ⁽¹⁾		Oleonature	
	Pienza 1458	Filigrana	Oleonature	

The product is supplied:

- in the Rigata grade (straight grain, substantially homogenous colour) in the 1 mm top layer version.
- in Fibramix grade (mixed grain presence of knots in some wood boards) in the 3,5 mm top layer version.

See the dedicated section on the www.listonegiordano.com website for

the detailed description of the different grades.
Waste due to elements' perimetric cutting is calculated between 10% and 20% though percentage may slightly vary according to dimension and shape of the surface area to be laid.
Our technical department is available, on the basis of CAD drawings provided by the client, to elaborate the floor plan drawings and detailed list of the

number of modules required for flooring installation.
Minimum quantity is 25 m². Smaller quantities are to be evaluated upon request. If accepted 300 € will be charged as setup **fixed costs**.
The delivered and invoiced quantity may exceed the one originally ordered with 4 m² or 4% tolerance (the highest between the two). **We require 40% advance payment in order to start**

production.
Before placing the order please check always availability and delivery time with the sales assistants.
⁽¹⁾ Available in Biancospino, Montblanc and Tortora colours.




Slide | Oak Biancospino

MIAMI LUXURY PROJECT
Valeria Torriani Design




TECHNICAL INFORMATION

TOP LAYER THICKNESS: 1 mm
 SUPPORT THICKNESS: 12 mm
 TOTAL THICKNESS: 13 mm
 SUPPORT: MULTILAYER COUNTER-BALANCED
 WEIGHT: 9 kg/m
 THERMAL RESISTANCE: 0,083 m²K / W
 INSTALLATION: GLUED-DOWN

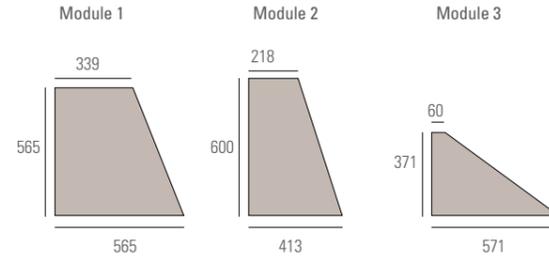


TOP LAYER THICKNESS: 3,5 mm
 SUPPORT THICKNESS: 9 mm
 TOTAL THICKNESS: 12,5 mm
 SUPPORT: BIRCH MULTILAYER
 WEIGHT: 9 kg/m²
 THERMAL RESISTANCE: 0,077 m²K / W
 INSTALLATION: GLUED-DOWN

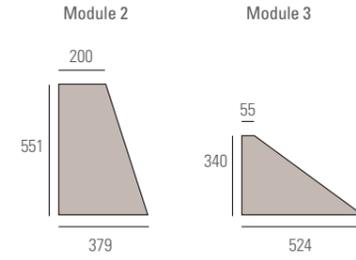


INSTALLATION PATTERNS


ELIO

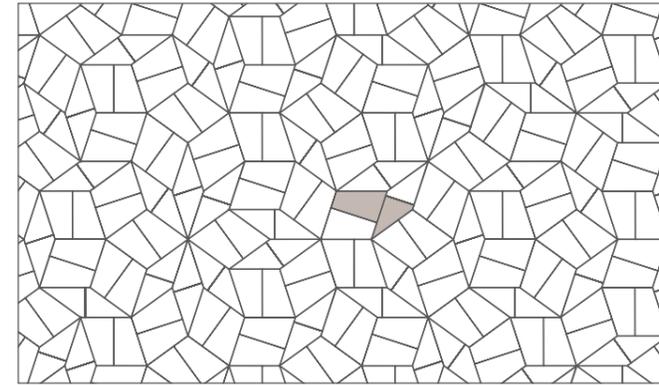


IDROGENO

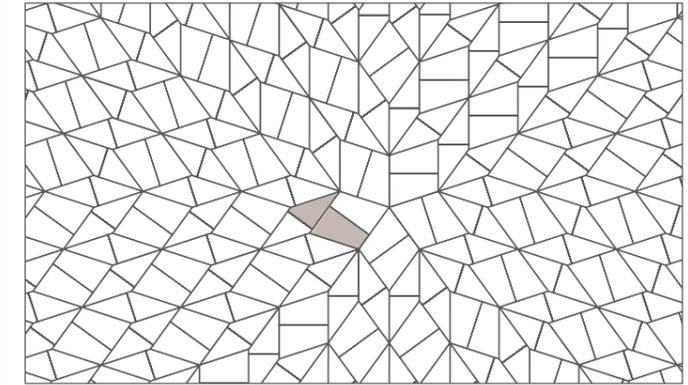

LITIO

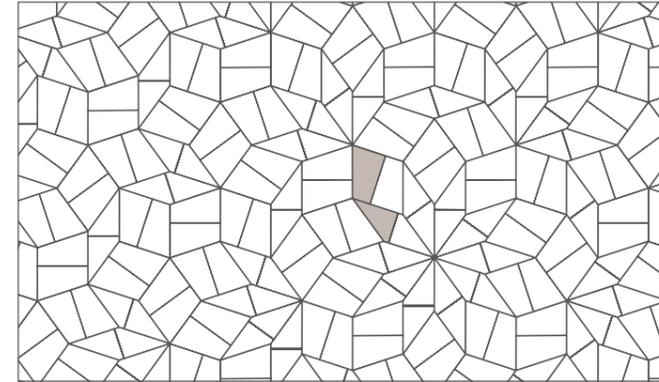

SODIO

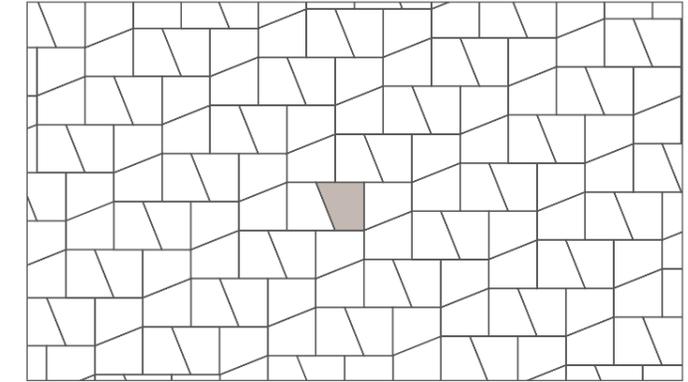

These elements are milled with groove profiles on four sides. They interlock by means of solid wood loose tongues supplied with the material.

Please check the technical sheets for more information on the installation patterns.

These products are suitable for underfloor heating and cooling system

provided that strict instructions on temperature and humidity are fully complied with.

Product's features may change with respect to the information in this document. For update information please check the technical sheets available on www.listonegiordano.com. We recommend to read the "General information" on page 4 and 5 during

the selection and purchasing phase focusing on the installation, use and maintenance instructions available on www.listonegiordano.com.

