

Listone
Giordano®

atelier

Heritage - Filigrana

Brushed surface



REGULAR INSTALLATION				190	140	140 smart
				total thickness 12,5 mm top layer 3,5 mm lengths 1500-2400 mm	total thickness 12,5 mm top layer 3,5 mm lengths 1200-2100 mm	total thickness 12,5 mm top layer 3,5 mm lengths 1000-1200 mm
	NAME	FINISH	GRADE			
OAK	Città della Pieve 1999	Oleonature	Esprit			
	Ostuni 1506	Oleonature	Esprit			
	Pienza 1458	Oleonature	Esprit			
	Fiesole 1125	Oleonature	Esprit			
	Civita 1695	Invisible Touch	Esprit			
	Civita 1695	Invisible Touch	Elegant (Fibramix)			
	Tuscania 1093	Invisible Touch	Esprit			
	Firenze 1565	Oleonature	Esprit			
	Siena 1179	Oleonature	Esprit			
	Monteriggioni 1213	Invisible Touch	Esprit			
Montesiepi 1185	Invisible Touch	Esprit				
OTHER WOOD	American Walnut	Oleonature	Esprit			


VARIANTS AND CUSTOMIZATIONS

Elegant (Fibramix) grade	Available in Oak products.
Floating installation	Available for floating version with 15 mm thickness. Only for regular installation.
Other formats	It may be customized in other lengths, widths and angles.

Each customized version is to be individually quoted, according to the product, type of customization and the requested quantity. Please get in contact with the sales assistants.

ITALIAN HERRINGBONE (90°)				140	90	55	40
				total thickness 12,5 mm top layer 3,5 mm lengths 890 and 1200 mm	total thickness 12,5 mm top layer 3,5 mm lengths 590 and 800 mm	total thickness 12,5 mm top layer 3,5 mm length 590 mm	total thickness 12,5 mm top layer 3,5 mm length 390 mm
	NAME	FINISH	GRADE				
OAK	Città della Pieve 1999	Oleonature	Esprit	154,60 ⁽¹⁾			
	Ostuni 1506	Oleonature	Esprit	169,50 ⁽¹⁾			
	Pienza 1458	Oleonature	Esprit	189,70 ⁽¹⁾			
	Fiesole 1125	Oleonature	Esprit	174,80 ⁽¹⁾			
	Civita 1695	Invisible Touch	Esprit	189,70			
	Tuscania 1093	Invisible Touch	Esprit	193,95 ⁽¹⁾			
	Firenze 1565	Oleonature	Esprit	174,80 ⁽¹⁾			
	Siena 1179	Oleonature	Esprit	189,70 ⁽¹⁾			
	Monteriggioni 1213	Invisible Touch	Esprit	207,00 ⁽¹⁾			
	Montesiepi 1185	Invisible Touch	Esprit	207,00 ⁽¹⁾			
OTHER WOOD	American Walnut	Oleonature	Esprit				

CHEVRON PATTERN (60°)				140	90	55	40
				total thickness 12,5 mm top layer 3,5 mm length 835 mm	total thickness 12,5 mm top layer 3,5 mm length 540 mm	total thickness 12,5 mm top layer 3,5 mm length 540 mm	total thickness 12,5 mm top layer 3,5 mm length 390 mm
	NAME	FINISH	GRADE				
OAK	Città della Pieve 1999	Oleonature	Esprit				
	Ostuni 1506	Oleonature	Esprit				
	Pienza 1458	Oleonature	Esprit				
	Fiesole 1125	Oleonature	Esprit				
	Civita 1695	Invisible Touch	Esprit				
	Tuscania 1093	Invisible Touch	Esprit				
	Firenze 1565	Oleonature	Esprit				
	Siena 1179	Oleonature	Esprit				
	Monteriggioni 1213	Invisible Touch	Esprit				
	Montesiepi 1185	Invisible Touch	Esprit				



NOTES

The products for regular installation are supplied in the same **length or mixed lengths**, subject to availability. The supply may include up to 10% of the surface of shorter material than specified.

setup **fixed costs**.

⁽²⁾ This product is available in the Elegant (Fibramix) grade.

⁽³⁾ Limited availability, lengths 490, 590 and 800 mm.


⁽¹⁾ The **minimum order quantity** is 25 m². Smaller quantities are to be evaluated upon request. If accepted 300 € will be charged as



TECHNICAL SPECIFICATIONS


heritage

TOP LAYER: 3.5 mm ⁽¹⁾
SUPPORT THICKNESS: 9 mm
TOTAL THICKNESS: 12.5 mm
SUPPORT: BIRCH PLYWOOD
WEIGHT: 9,4 kg/m² ⁽²⁾
THERMAL RESISTANCE: 0.077 m² K/W ⁽²⁾
INSTALLATION: GLUED-DOWN

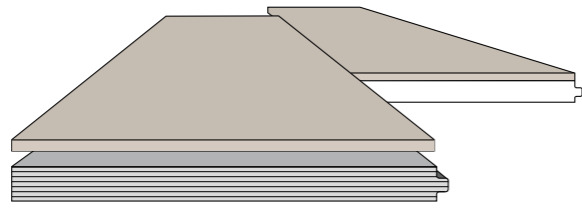



désir

TOP LAYER: 3.5 mm
SUPPORT THICKNESS: 9 mm
TOTAL THICKNESS: 12,5 mm
SUPPORT: BIRCH PLYWOOD
WEIGHT: 9,4 kg/m²
THERMAL RESISTANCE: 0.077 m² K/W
INSTALLATION: GLUED-DOWN




réserve

TOP LAYER: UP TO 3.5 mm ⁽¹⁾
SUPPORT THICKNESS: 14.5 mm
TOTAL THICKNESS: 18 mm
SUPPORT: BLOCKBOARD WITH OAK COUNTER-BALANCEMENT
WEIGHT: 11,6 kg/m²
THERMAL RESISTANCE: 0.125 m² K/W
INSTALLATION: GLUED-DOWN OR FLOATING

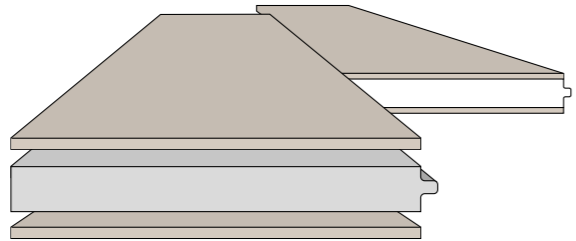



ancien | Quattrocento italiano

TOP LAYER: 5 mm
SUPPORT THICKNESS: 9 mm
TOTAL THICKNESS: 14 mm
SUPPORT: BIRCH PLYWOOD
WEIGHT: 10,5 kg/m² ⁽²⁾
THERMAL RESISTANCE: 0.086 m² K/W ⁽²⁾
INSTALLATION: GLUED-DOWN

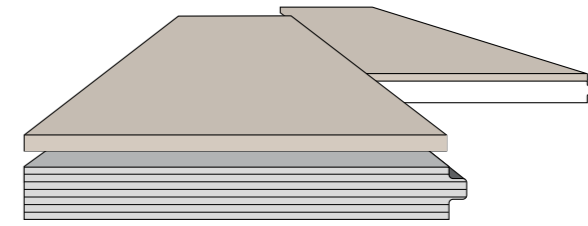



undici

TOP LAYER: 3.5 mm
SUPPORT THICKNESS: 9 mm
TOTAL THICKNESS: 12.5 mm
SUPPORT: BIRCH PLYWOOD
WEIGHT: 9,4 kg/m²
THERMAL RESISTANCE: 0.077 m² K/W
INSTALLATION: GLUED-DOWN



decó

TOP LAYER: 3.5 mm
SUPPORT THICKNESS: 9 mm
TOTAL THICKNESS: 12.5 mm
SUPPORT: BIRCH PLYWOOD
WEIGHT: 9,4 kg/m² ⁽²⁾
THERMAL RESISTANCE: 0.077 m² K/W ⁽²⁾
INSTALLATION: GLUED-DOWN



All products in the Atelier range are compatible with heating and cooling underfloor systems provided they are installed with the glue down method and the instructions on operating temperature and humidity are strictly complied with.

During product selection we recommend reading the "General information" on page 6 and view the requirements relating to installation, use and maintenance that are available on www.listonegiordano.com

Product features and specifications may change with respect to the information in this document. For up-to-date information please refer to the documentation available on www.listonegiordano.com

⁽¹⁾ Versions of these products feature an uneven top layer after the surface processing and the thickness may be reduced in some areas compared to the one above mentioned.

⁽²⁾ Average indicative figures (in the case of weight it refers to the product including packaging)

TECHNICAL SPECIFICATIONS

FINISHES

INVISIBLE TOUCH

CRYSTALCARE

Water-based, air-dried finish. It protects wood whilst preserving the natural appearance and touch of an untreated surface. This finish features the anti-bacterial Crystalcare technology.

OLEONATURE

CRYSTALCARE

Natural oil-based, air-dried finish. Thanks to a special protective treatment applied as last coat, it features high protection and convenient maintenance. This finish features the anti-bacterial Crystalcare technology.

SURFACE PROCESSING

Filigrana

The brushing treatment of the surface enhances the wood grain pattern.

Traccia

Hand crafted surface that features the typical marks of hand planing.

Filo di Lama

Rough sawn surface effect.

Mareggiata

Handcrafted surface highlighting knots and the authentic features of the wood, to give the appearance of material exposed to weathering.

Incisione

The surface is decorated with a light bas-relief engraving.

GRADES

Elegant (Fibramix)

Mixed grain. The boards may feature colour variations and knots. In the extra wide boards (width from 140 mm and over), knots may even be filled or partially filled.

Charme (Country)

Mixed grain and colour variations. Widespread presence of knots, including filled or partially filled ones.

Esprit

Mixed grain, naturally uneven hue variation, marked and widespread presence of filled or open fissures, as well as encased, tight or only partially filled knots.

Unica


Mixed grain and colour variations. Presence of knots, including filled or partially filled ones. Some boards may contain sapwood according to the different wood species.

Atelier wood flooring collections feature uneven shape and appearance typical of a hand-made product. Visible differences between planks or within the same plank (i.e. uneven and/or rough surface, difference in hues) are not to be considered defects but rather represent the very essence of the product.


Wood is a natural and variegated material. The pictures and brief descriptions in this document cannot fully represent the appearance of each product and must therefore be understood as indicative and not contractually binding. A more complete and detailed description of the various grades is available on www.listonegiordano.com.

PROFILES


MICRO BEVEL

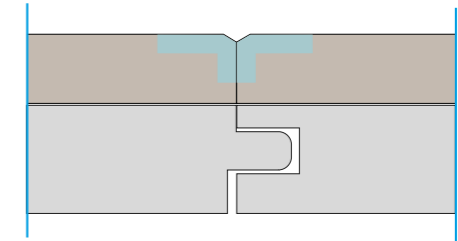


BEVEL

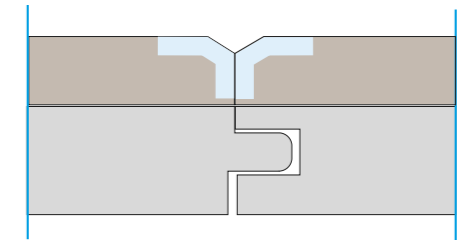


BEVEL AND GROOVE

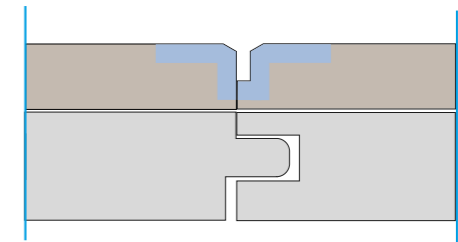

STAIR NOSINGS (PROFILE A)

		PRODUCTS	
	1200 mm	190 mm	40 mm
	All products		

STAIR NOSINGS (PROFILE B)

		PRODUCTS	
	1200 mm	190 mm	190 mm
	All products		

THRESHOLD MOULDINGS

		PRODUCTS	
	30 mm	1200 mm	
	All products		

When placing the order, please specify the characteristics of the corresponding wood floor.

These products are manufactured upon request. The delivery time is approx 30 days from order's confirmation. For products with dimensions, shapes and colours other than standard, prices and

delivery terms will be confirmed from time to time.

The front of "profile A" stair nosings has no surface processing.

The standard elements of stairnosings are not designed to be fitted side by side. If you require this kind of installation please check

feasibility, costs and timing with your sale assistant.



These products are an handcrafted product so tolerances are typical of an artisan process.

Stairnosings and reducers have to be installed only glued down, regardless of the type of installation of corresponding wood

LISTONE GIORDANO PLATE

		PRODUCT	
			
	Aluminium "Listone Giordano" brand plate including flush installation into one of the boards supplied		

GLUE


		PRODUCTS	
			
	ECOLFIT (environmentally-friendly one-component silane adhesive) - 14 kg tin Average yield: 1,2 Kg/m ² . It is strictly connected to the conditions of the subfloor.		
			
	VINYL ADHESIVE (vinyl adhesive suitable for the joints of floating wood flooring) - 0.5 Kg tin Average yield: 2,5 m ² /package		

MAT UNDERLAYMENT

		PRODUCT	
	Polyethylene mat underlayment for floating floors. Thickness 3 mm. - 15 m ² package.		




WHITE SKIRTING BOARDS

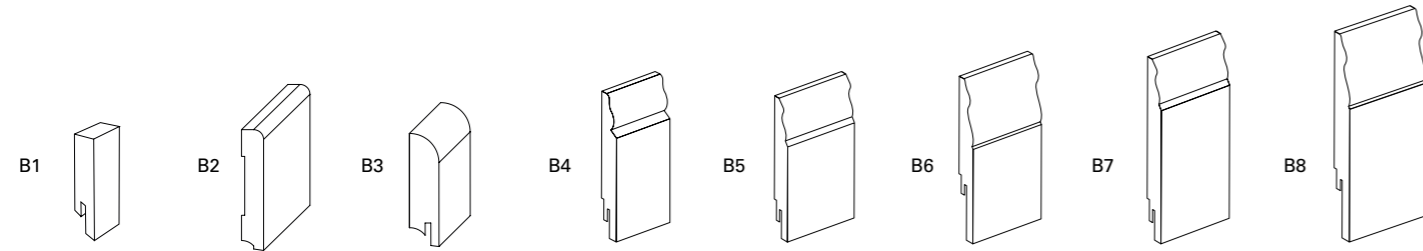

Profile	Height	Thickness	Length	Pretreated ⁽¹⁾	RAL 9003 white	RAL 9010 white
B1	45 mm	13 mm	2,40 m			
B1	50 mm	10 mm	2,40 m			
B2	80 mm	14 mm	2,40 m			
B3	60 mm	16 mm	2,40 m			
B3	70 mm	10 mm	2,40 m			
B4	96 mm	16 mm	2,40 m			
B5	96 mm	16 mm	2,40 m			
B6	108 mm	16 mm	2,40 m			
B7	118 mm	16 mm	2,40 m			
B8	130 mm	16 mm	2,40 m			

NATURAL WOOD SKIRTING BOARDS



Profile	Height	Thickness	Length	Wood types	Oleonature	Invisible Touch
B3	60 mm	16 mm	2,40 m	Oak Erice		
B3	60 mm	16 mm	2,40 m	Oak Firenze, Siena, Pisa		
B3	60 mm	16 mm	2,40 m	Oak Cefalù		
B3	70 mm	10 mm	2,40 m	Oak Città della Pieve		
B3	70 mm	10 mm	2,40 m	Oak Ostuni, Fiesole, Firenze, Siena		
B3	70 mm	10 mm	2,40 m	Oak Civita, Toscana		
B3	70 mm	10 mm	2,40 m	Oak Pienza, Rapolano, San Gimignano, Montalcino, Bagno Vignoni, Erice		
B3	70 mm	10 mm	2,40 m	American Walnut		
B3	70 mm	10 mm	2,40 m	European Walnut		
B3	70 mm	10 mm	2,40 m	Teak		

⁽¹⁾ Untreated surface to be finished on site with colour of choice.

The skirting boards do not feature any surface treatments, except for the Erice Oak version 60x16 mm.

boards to match Undici and Heritage Monteriggioni and Montesiipi floors.

The wood veneer of the skirting board may feature different grain and hue from the related wood flooring material.

⁽¹⁾ Supplied with sawn cut effect.

It is recommended to use white skirting

